

Hydraulic Equipment

YUKEN PRODUCTS FOR EVERY NEED

As a specialized manufacturer of hydraulic equipment, **YUKEN** is trying hard to meet our customers' various requirements with a continuous effort to develop new products and improve the existing products.

This catalogue is compiled to introduce the line-up of Yuken's products.

It does not represent detailed technical information such as dimensions, specifications and characteristics of each and every product Yuken manufactures. If you require such information, please contact us or ask our sales representative for the "Engineering Information Catalogue" or "Product Catalogue" which are prepared separately.




Head Office & Sagami Plant

[Head Office]

4-34, Kamitsuchidana-Naka 4-chome,
Ayase, Kanagawa Prefecture, 252-1113, Japan
Tel. 81-467-77-3111
Fax. 81-467-77-3115
URL <http://www.yuken.co.jp>
E-mail int.bd@yuken.co.jp

INDEX

3	PISTON PUMPS
9	AC SERVO MOTOR DRIVEN PUMPS
12	VANE PUMPS
13	PRESSURE CONTROLS
14	FLOW CONTROLS
15	DIRECTIONAL CONTROLS
18	MODULARS
22	PROPORTIONAL ELECTRO-HYDRAULIC CONTROLS
24	LINEAR SERVO VALVES
26	HYDRAULIC CYLINDERS
28	ENERGY-SAVING HYDRAULIC UNITS AND CONTROLLERS
29	STANDARD HYDRAULIC POWER UNITS

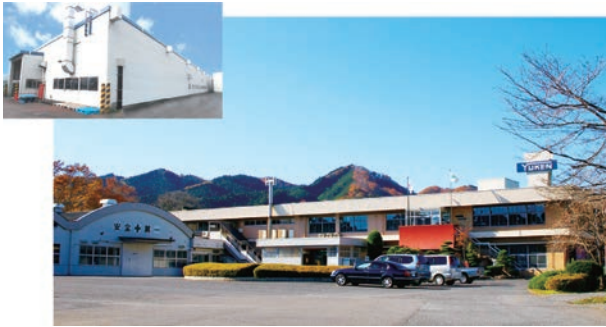

Fukuroda Factory

[Affiliated Companies]

CHINA

■ **Yuken Kogyo (Shanghai) Co., Ltd**
(Head Office)
Room916, Bldg.B, Far East International Plaza, No.317 Xian Xia Road, Shanghai, CHINA
Tel. +86-21-6235-1313
Fax. +86-21-6235-0673
URL <http://www.yuken-china.com.cn>

(Dalian Branch)
Rm. 1505, Rainbow Building, No.23, Renmin Road Zhongshan District, Dalian Liaoning, CHINA
Tel. +86-411-3986-9129
Fax. +86-411-3986-9127

■ **Yuken Kogyo (Foshan) Co., Ltd.**
Unit 101, NO.1, Keying International Industrial Zone, NO.7 Xinghai Road, Shunde Industrial Zone, Wusha Daliang, Shunde Foshan, CHINA
Tel. +86-757-2280-5066
Fax. +86-757-2280-5068
URL <http://www.yuken-china.com.cn>

■ **Yuken Hydraulics (Zhangjiagang) Co., Ltd.**
No.9 Xin Jing Xi Road, Zhangjiagang Economic Development Zone, Jiangsu, CHINA
Tel. +86-512-5699-2111
Fax. +86-512-5699-2100

Service Center in China

■ **Yuken Kogyo (Ningbo) Hydraulic Technology Company Limited**
1st Floor, Block No.5, No.58 Ke Chuang South Road, Wang Chun Industrial Zone, Ningbo City, Zhejiang, CHINA
Tel. +86-574-8792-8836
Fax. +86-574-8792-9773

HONG KONG-CHINA

■ **YUKEN KOGYO (H.K.) COMPANY LIMITED**
Flat20, 7F., Block B Focal Industrial Centre, 21 Man Lok Street, Hung Hom, Kowloon, HONG KONG
Tel. +852-2362-2355
Fax. +852-2765-7612

TAIWAN

■ **YUKEN HYDRAULICS (T.W.) CO., LTD.**
(Head Office)
No.12, 7th Road, Taichung Industrial Park, Taichung, TAIWAN R.O.C.
Tel. +886-4-2359-3077
Fax. +886-4-2359-8813
URL <http://www.yuken.com.tw>

(Taipei Branch)
No.18-1, Wun Hua 5th Road, Guei Shan Township, Taoyuan County, TAIWAN R.O.C.
Tel. +886-3-328-3628
Fax. +886-3-328-3242

KOREA

■ **Yuken Korea Co., Ltd**
(Head Office)
Rm 210, ASIA Bld., 590, Gyeongin-Ro, Guro-Gu, Seoul, KOREA
Tel. +82-2-2675-2110
Fax. +82-2-2675-2104
URL <http://www.yuken.co.kr>

(Busan Branch)
557-10 Gwaebeop-Dong, Sasang-Gu, Busan, KOREA
Tel. +82-51-315-2110
Fax. +82-51-315-2104

(Gimhae Branch)
58-1, Jangyu-Ro 115, Gimhae-Si, Gyeongsangnam-Do, KOREA
Tel. +82-55-312-2150
Fax. +82-55-312-2107

THAILAND

■ **YUKEN SEA CO., LTD.**
1 Glas Haus Building, 9th Floor Unit903 Sukhumvit 25 Road, Khlongtoei-nue Wattana, Bangkok, THAILAND
Tel. +66-2-259-2802
Fax. +66-2-259-2803
URL <http://www.yuken-sea.com>

INDIA

■ **YUKEN INDIA LIMITED**
No.11,12,16,17,18,Koppalthimanahalli Village, Malur-Hosur Road, Malur Taluk,Kolar District, Kamataka 563160, India
Tel. +91-80-2845-2262
Fax. +91-80-2845-2261
URL <http://www.yukenindia.com>

UNITED KINGDOM

■ **YUKEN EUROPE LTD**
51 Spindus Road, Speke Hall Industrial Estate, Liverpool L24 1YA UNITED KINGDOM
Tel. +44-151-486-4696
Fax. +44-151-486-3537
URL <http://www.yuken.co.uk>

Piston Pumps

ARL1 Series Piston Pumps

The ARL1 series piston pumps are compact, low noise, and high efficiency pressure compensator type piston pumps based on the proven technology and reliability of Yuken's "A series/AR series" piston pumps. These pumps cover the small displacement range from 6.2 to 16.3 cm³ /rev.



AR Series Variable Displacement Piston Pumps


These AR series pumps have been developed on the basis of the same design concept as A series pumps which are renowned for high efficiency and low noise level.

The size of the pump is more compact. The noise level has also been reduced.



A Series Variable Displacement Piston Pumps

The A series variable displacement piston pumps are high efficiency swash plate type piston pumps developed using Yuken's unique technology to meet customers' needs for energy efficient and low noise solutions. These pumps support a wide variety of displacement sizes and control types and are widely used in various hydraulic systems.

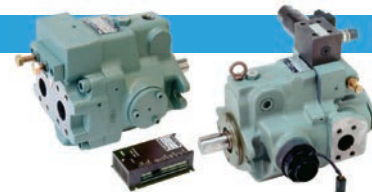

A3H Series Variable Displacement Piston Pumps

These A3H Series variable displacement piston pump offer high pressure, high efficiency, high speed and low noise features. This pump series has been developed using Yuken's unique design concept and cumulative technologies.

They are suitable for use with construction machinery and various industrial machinery ranging from presses to injection moulding machines.



A3HG Series Variable Displacement Piston Pumps

A3HG series pumps are high pressure variable displacement piston pumps based on our highly reputable "A3H" series pumps and meeting international standards (ISO and SAE). They have a rated pressure of 31.5 MPa and a maximum operating pressure of 35 MPa.

These pumps meet JIS standards as well as ISO standards common in Europe and SAE standards in North America to ensure interchangeability with pumps available on the global market.




A7H Series Variable Displacement Piston Pumps

The A7H series variable displacement piston pumps offer a displacement of 180, 270 cm³/rev with a rated pressure of 35 MPa and a maximum pressure of 40 MPa, supporting high pressure / high flow applications. The non-drive side of these pumps can be connected to an additional pump with SAE connection to provide a combined pump.



Pump Type		Maximum Operating Pressure MPa	Geometric Displacement cm ³ /rev										
			1	2	5	10	20	50	100	200	300		
"ARL1" Series Piston Pumps		7			ARL1-6	ARL1-8	ARL1-12	ARL1-16					
"AR" Series Variable Displacement Piston Pumps		16			AR16	AR22							
"A" Series Variable Displacement Piston Pumps	Single Pumps	21		A10	A16	A22	A37	A45	A56	A70	A90	A100	
		16											
		21											
		28											
	Double Pumps	28			A16	A22	A37	A56	A70	A90	A100	A145	A220
	Variable / Fixed Double Pumps	28			A16	A22	A37	A56	A70	A90	A145		
		28			PV2R1	PV2R2							
					A16	A22	A37	A56	A70	A90	A145		
					A3H16	A3H37	A3H56	A3H71	A3H100	A3H145	A3H180		
"A3H" Series Variable Displacement Piston Pumps		35											
"A3HG" Series Variable Displacement Piston Pumps		35			A3HG16	A3HG37	A3HG56	A3HG71	A3HG100	A3HG145	A3HG180		
"A7H" Series Variable Displacement Piston Pumps		40										A7H180	A7H265

“ARL1” Series Piston Pumps

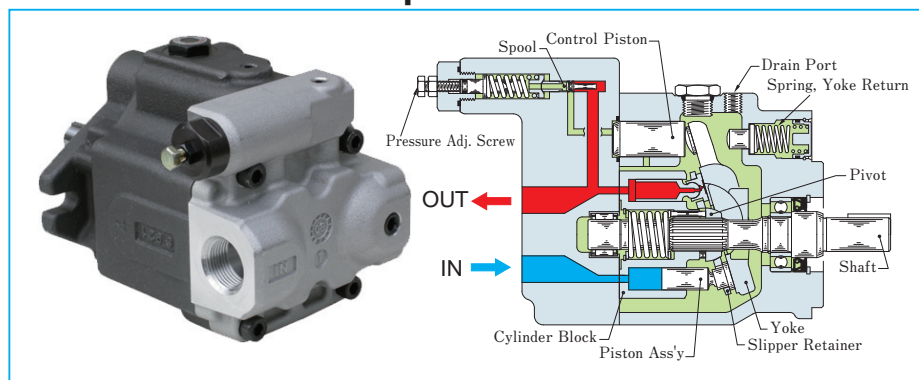


Features

● Compact size

The “ARL1” series piston pumps are designed to offer 44% reduction in weight and 50% reduction in capacity and significantly smaller in size and lighter in mass compared with the “AR” series piston pumps.


“ARL1-16” type performance characteristics

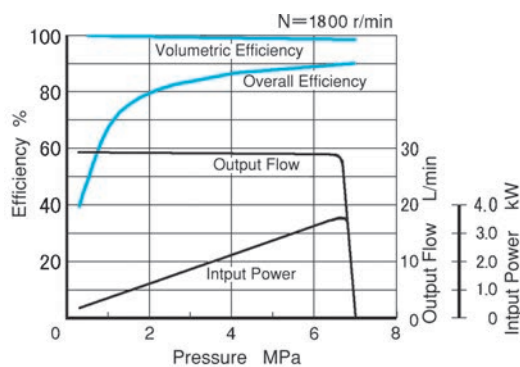

● Low noise level

The noise level of the ARL1 pump is as low as 55dB(A) [at 7MPa full cut-off pressure and 1500r/min] measured one metre horizontally away from the pump head cover.


noise level characteristics

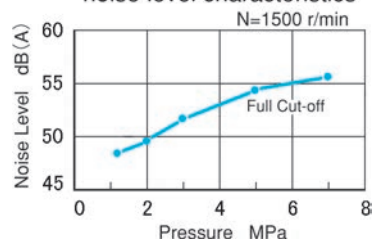

Control Type

Control Type	Graphic Symbols
“01” Pressure Compensator Type	
	Performance Characteristics

“AR” Series Variable Displacement Piston Pumps

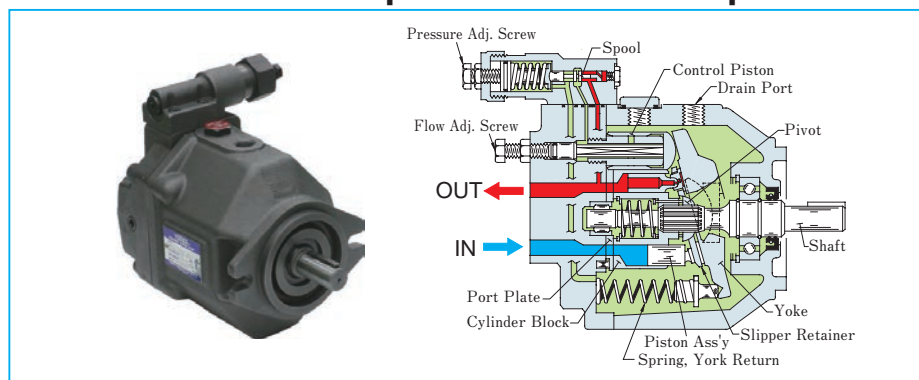

Features


● Smaller in Size

As indicated in the dimensional comparison presented below, the AR16 is smaller than the A16 (32 design).



● Low Noise

The noise level of AR16 has been reduced by 1-2 dB (A) at full flow and full cut-off compared with that of the excellent A16 quiet pump.

[Comparison of “AR16” with “A16”]

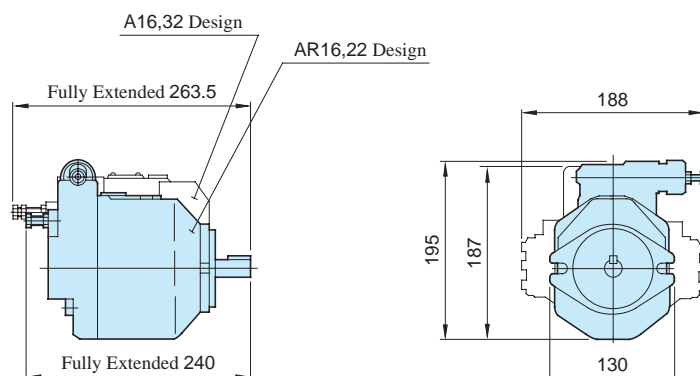


"A" Series Variable Displacement Piston Pumps

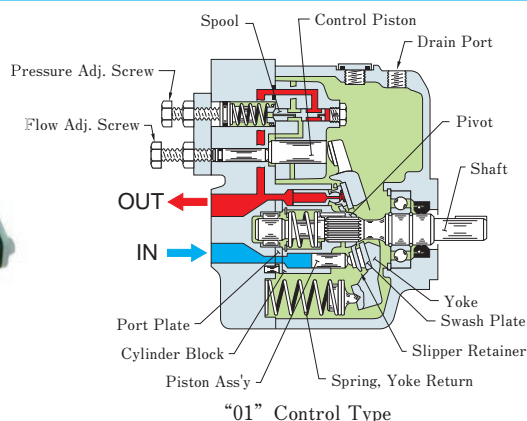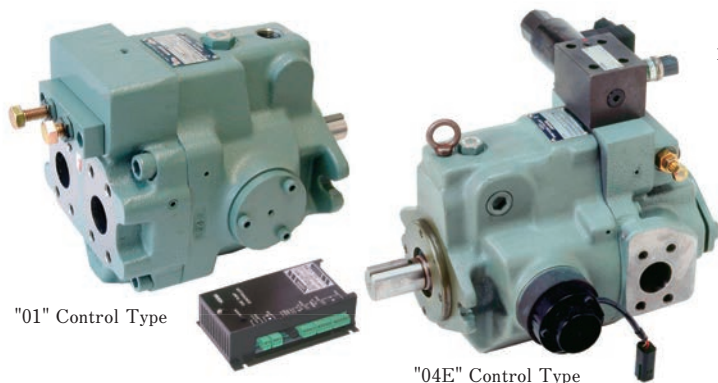


Features

● High efficiency

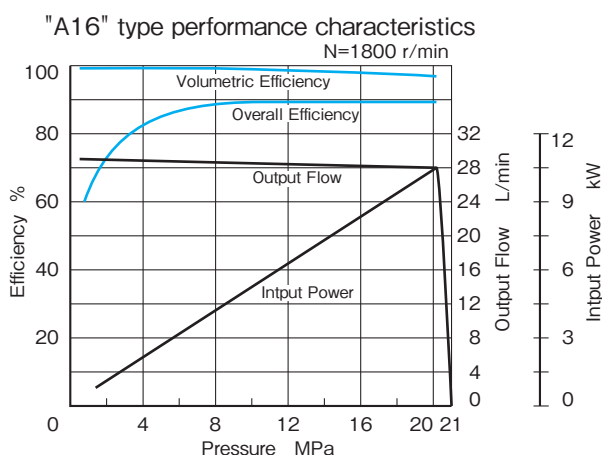

● Low noise level


The noise level of the A16 pump is as low as 57.3dB(A) [at 21MPa full cut-off pressure and 1500r/min] measured one metre horizontally away from the pump head cover.

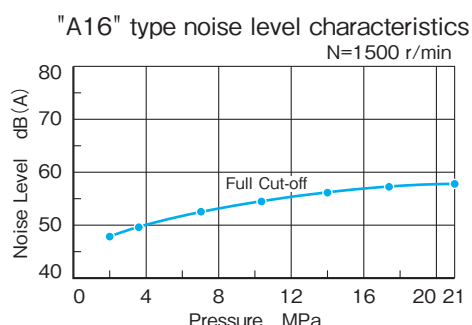

Control Type

Control Type	Graphic Symbols	Performance Characteristics	Control Type	Graphic Symbols	Performance Characteristics
"01" Pressure Compensator Type			"05" Two-Pressure Two-Flow Control Type by System Pres.		
"02" Solenoid - two Pressure Control Type			"06" Two-Pressure Two-Flow Control Type with Solenoid Valve		
"03" Pressure Compensator with Unloading Type			"07" Pilot Pressure Control Type Pressure Compensator		
"04" Proportional Electro - Hydraulic Load Sensing Type			"09" Constant Power Control Type		
"04E" Electro - Hydraulic Proportional Pressure & Flow Control Type			"00-Z500" Simple Two-Pressure Two-Flow Control Type		
"04EH" Electro - Hydraulic Proportional Pressure & Flow Control Type (OBE Type)					

"A3H" Series Variable Displacement Piston Pumps

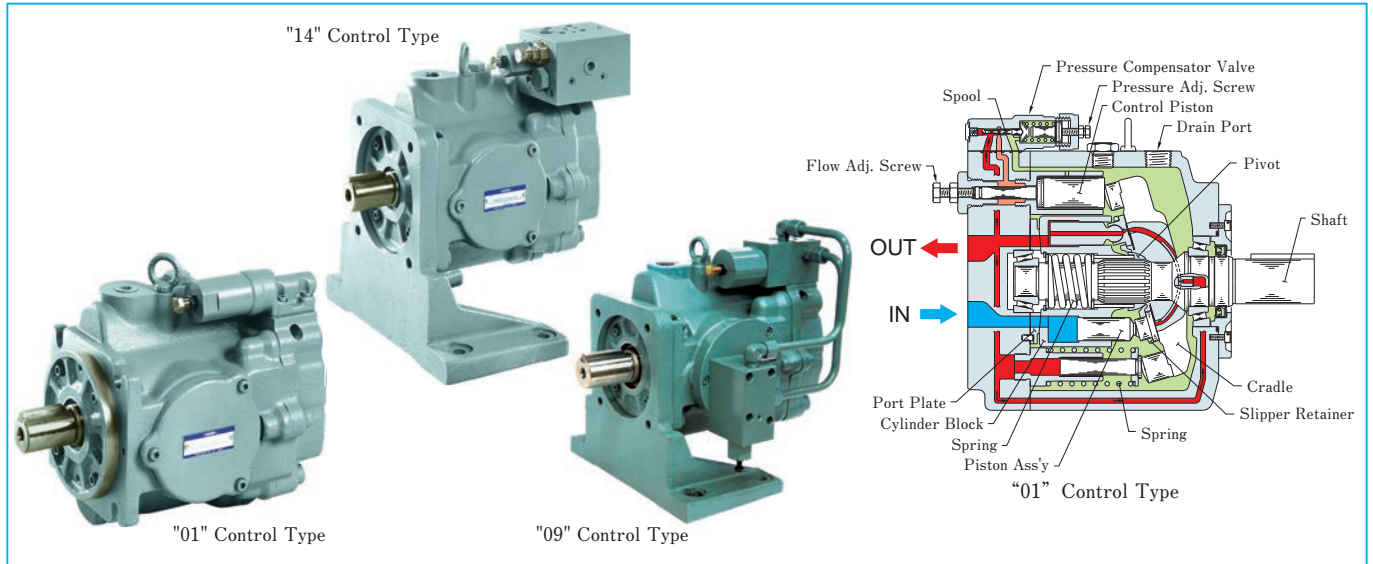


Control Type

Control Type	Graphic Symbols	Performance Characteristics
"01" Pressure Compensator Type		
"09" Constant Power (Torque) Control Type		
"14" Load Sensing Type		
"55" Simple Two-Pressure Two-Flow Control Type		

Features

- High efficiency
"A3H37" type performance characteristics.

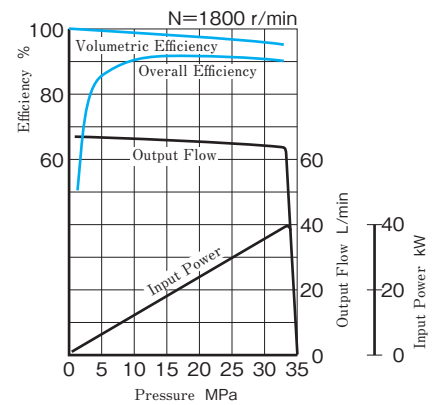


- Compact size
A3H series are compact in size because output / mass ratio is large.

Specifications


Model Numbers	Geometric Displacement cm ³ / rev	Minimum Adj. Flow cm ³ / rev	Operating Pres. MPa		Shaft Speed Range r/min		Mass kg (01 Control type)	
			Rated	Intermittent	Max.	Min.	Flange Mtg.	Foot Mtg.
A3H16-※R※KK ⁽¹⁾	16.3	8	28	35	3600	600	14.5	23.4
A3H37-※R※KK	37.1	16			2700	600	19.5	27.0
A3H56-※R※KK	56.3	35			2500	600	25.7	33.2
A3H71-※R※KK	70.7	45			2300	600	35.0	42.5
A3H100-※R※KK	100.5	63			2100	600	44.6	72.6
A3H145-※R※KK	145.2	95			1800	600	60.0	88.0
A3H180-※R※KK	180.7	125			1800	600	70.4	98.4

(1) The "A3H16" model does not support the "09" control type.


“A3HG” Series Variable Displacement Piston Pumps



"01" Control Type

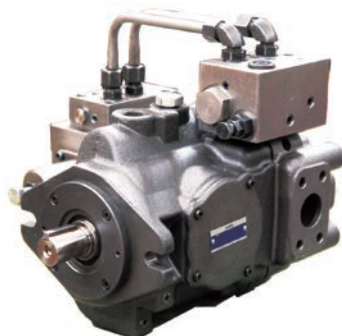

"09V" Control Type

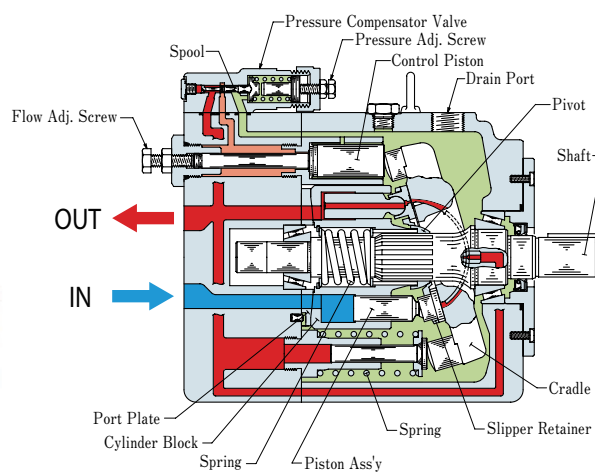

"01" Control Type


Control Type

Control Type	Graphic Symbols	Performance Characteristics
"01" Pressure Compensator Type		
"07" Pilot Pressure Control Type Pressure Compensator		
"09V" Constant Power (Torque) Control Type With External Pilot		
"14" Load Sensing Type		

Features

- Wide assortment of models to ensure interchangeability with pumps available on the global market
European models: Compatible with ISO 3019-2, North American models: Compatible with SAE J744 Standard models are available with keyed or splined shaft end.
- Wide displacement range and high volumetric efficiency
While inheriting the high performance of A3H series pumps, A3HG series pumps feature higher rated pressure design (31.5 MPa). They can be used as pumps capable of handling moderate to high loads in a wide range of applications.
- Through drive supplied as standard
The through drive allows for multiple pump installation with a pump on the drive side and another pump with up to the same capacity as the other pump on the non-drive side. All pumps meeting international standards can be used on the non-drive side.

"A3HG100" type performance characteristics

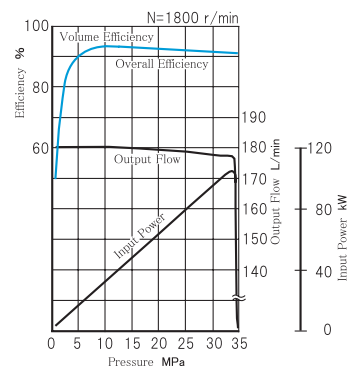


Specifications

Model Numbers	Geometric Displacement cm ³ / rev	Minimum Adj. Flow cm ³ / rev	Operating Pres. MPa		Shaft Speed Range r/min		Mass kg (01 Control type Flange mounting)
			Rated	Intermittent	Max.	Min.	
A3HG16-※R※K※ ⁽¹⁾	16.3	8	31.5	35	3600	600	17
A3HG37-※R※K※	37.1	16			2700	600	26.5
A3HG56-※R※K※	56.3	35			2500	600	32.5
A3HG71-※R※K※	70.7	45			2300	600	45
A3HG100-※R※K※	100.5	63			2100	600	56.5
A3HG145-※R※K※	145.2	95			1800	600	68.5
A3HG180-※R※K※	180.7	125			1800	600	88

(1) The "A3HG16" model does not support the "09V" control type.

"A7H" Series Variable Displacement Piston Pumps

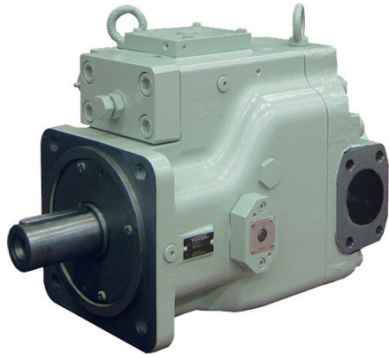


■ Features

- **High Pressure–Large Volume Displacement**
Adding to current A3H series, 180, 270 cm³/rev displacement with rated pres. 35 MPa, Max. pres. 40 MPa pumps are now available.
- **Optional Through Drive**
Optional through drive allow an auxiliary or outboard pump (SAE Standard) to be directly mounted.
- **Fire-Resistant Fluids**
Water-Glycols and Polyol Ester Type are applicable under certain condition.
- **High Efficiency**

■ Control Type

Control Type	Graphic Symbols	Performance Characteristics
"01" Pressure Compensator Type		
"09" Constant Power Control Type		
"09R" Constant Power Control Type with External Pilot		

"A7H180" type performance characteristics

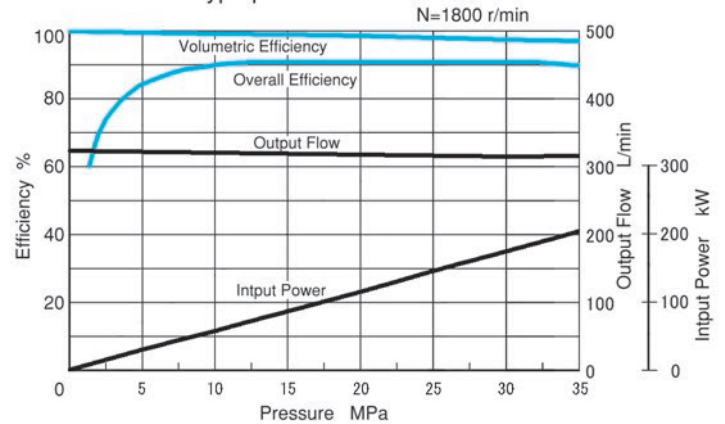

■ Specifications

Series Numbers	Geometric Displacement cm ³ /rev	Operating Pressure MPa		Shaft Speed Range r/min		Temperature Range °C	Viscosity Range mm ² /s	Approx Mass kg	
		Rated	Intermittent	Rated	Max.			Flange Mtg.	Foot Mtg.
A7H180	180	35	40	1800	1900	-20 – +80	10–1000	150 "01" 154 "09"	220 "01" 224 "09"
A7H265	270	35	40	1200	1600			220 "01" 224 "09"	310 "01" 314 "09"

■ Specifications for Special Fluids

Type of Fluids	Series Number	Operating Pressure MPa		Shaft Speed Range r/min		Temperature Range °C	Viscosity Range mm ² /s
		Rated	Intermittent	Rated	Max.		
Water-Glycols	M-A7H180	21	25	1800	1800	10–50	20–1000
	M-A7H265			1200	1200		
Polyol ester Type	P-A7H180	35	40	1800	1900	10–70	10–1000
	P-A7H265			1200	1600		

AC Servo Motor Driven Pumps

Revolution
Control System

ASR Series AC Servo Motor Driven Pumps

The ASR series provides variable flow by driving a piston pump directly with an AC servo motor and controlling the rotational speed in a range from zero to the maximum level.

This series allows for precise control of flow / pressure by using a dedicated AMSR controller. It also offers excellent response and repeatability.



ASE Series AC Servo Motor Driven Pumps

The ASE series pumps inherit the basic concept of the shaft speed control from the ASR series pumps and offer high cost performance.

The pumps of this series offer easy shaft speed control for systems that do not require as much precision, response, or repeatability as the ASR series pumps offer.

With the output flow and the discharge pressure controlled by a dedicated AMSE controller, precision, response and repeatability of systems using the ASE series pumps have been improved compared with those using conventional variable displacement piston pumps.




ASU Series AC Servo Motor Driven Pumps

There is "ASU Series AC Servo Driven Pumps", which is constructed in Gear pump and AC servo motor. For the details, please consult us.


Specifications

Model	ASR1-C	ASR2-C	ASR3-E, G	ASR5-G, J	ASR10-J, M	ASE3	ASE5	ASE10	ASE10W	ASE15W
Max. Flow L/min	39.5	55.5	92.3	129	200	80.8	132.7	205.4	200	302
Max. Operating Pres. MPa	21	16	21	21	21	17.5	17.5	17.5	17.5	21
Min. Adj. Pres. MPa	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
Motor Output kW	4.5	4.5	6 to 8	8 to 11	11 to 15	11	20	35	20	35
Mass (Pump + Motor) kg	54	54	80 to 89	94 to 177.5	213 to 233	75	123	190	173	241.5
Input Signal Voltage	0 to +10V DC (Max.)									
Monitor Output Voltage	0 to +10V DC									
Sequence I/O	Photo Coupler Input 8ch/Open Collector Output 6ch					Photo Coupler Input 8ch/Open Collector Output 5ch				
Power Supply	3-Phase AC 200 to 230 V/3-Phase AC 380 to 480 V, 50/60 Hz									3-Phase AC 380 to 480 V 50/60 Hz


Graphic Symbols




ASR
Single Displacement Type



ASR
Dual Displacement Type



ASE
Single Displacement Type

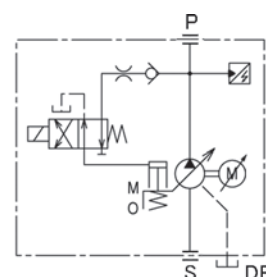

ASE10W&15W
Dual Displacement Type


“ASR” Series AC Servo Motor Driven Pumps



Features

- **High Performance**
Special high power servo motor (SPM) and variable displacement piston pump → Improved ultralow speed molding & continuous pressure holding performance and excellent repeatability.
- **High response**
Ultra precise molding by high response injection with a high-efficiency piston pump.
- **Energy saving**
Power consumption less than half that of hydraulic machines and equivalent to that of full electric machines, with reduced standby power consumption
→ Dual displacement models allow more compact system designs.
- **Less wiring**
Wire saving and miswiring prevention through the integration of the controller/driver and the use of special cables.
- **Large flow**
The AMSR controller has a combination function that supports operation with large flow up to 3200 L/min (ASR10 × 16 units).

System Configuration

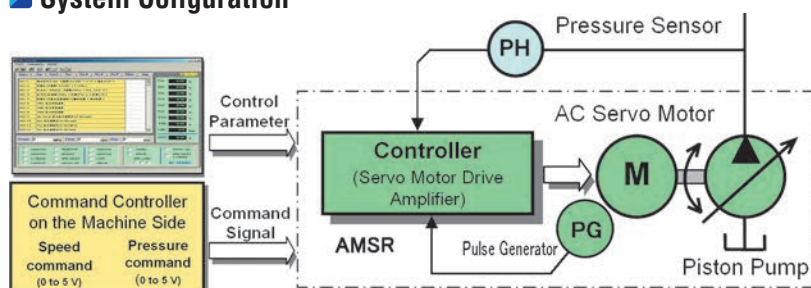


A feedback loop is by the AMSR controller that computes deviations between control signals from the machine side (speed and pressure commands) and sensor signals to drive the AC servo motor accordingly. Control parameters can be set digitally by using dedicated software. The AC servo motor is selected according to the torque and shaft speed required to drive the hydraulic pump. The selection of an appropriate motor for the load condition is important.


Sample of Pressure–Flow Diagram

- Max Continuous Operation Time:100 sec.
- Max Continuous Operation Time: 30 sec.


ASR1-※C-H※-




ASR2-※C-C※-




ASR3-※C-H※-



ASR5-※C-H※-



ASR10-※I-H※-




Model Number Designation

ASR3	—4	G	—H	X	S	A100*1	N*1	—A	00	—12
Series Numbers	Power Supply Voltage	Power Capacity	Max. Operating Pres.	Flow Setting	Port Direction	Coil Type for Solenoid Operated Directional Valve	Electrical Conduit Connection for Solenoid Operated Directional Valve	Function Selection	Parameter Number	Design Number
ASR1	None: AC200V 4: AC400V	C	H: 21 MPa	X: Single Displacement Type	S: Side	AC A100: AC100V A120: AC120V A200: AC200V A240: AC240V	None: Terminal Box N: Plug-in Connector (Optional)	A: Single B: Combination (Single Operation Allowed)	00: Standard	12
ASR2		C	C: 16 MPa		None: Axial	DC None: DC24V D12: DC12V D48: DC48V				12
ASR3		E, G	H: 21 MPa							W: Dual Displacement Type
ASR5		G, J		12						
ASR10		J, M		12						

*1 Apply to only Flow Setting "W".


“ASE” Series AC Servo Motor Driven Pumps

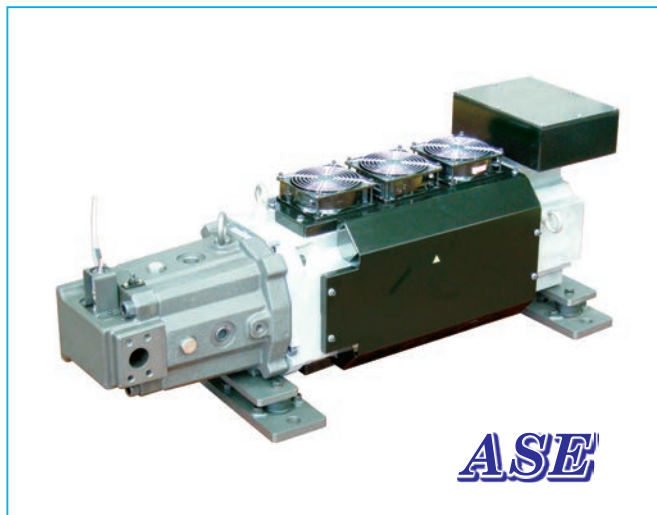

Features

- Low noise
Noise reduction insulation included as standard.
- Less wiring/high reliability
Uses sensor-less rotational speed control.
- Space saving/compactness
Integrated motor pump unit.
- Larger motor output
(compared with other products in the same flow capacity range) Max. motor output is 11 to 35 kW (@ASE15W).
- Easy maintenance
Adopting a cartridge fan and desorption terminals.
- Reduced electrical noise
Using environmentally friendly EMC filter.
- Large flow
Up to 4800 L/min with AMSE combination function and 16 units of ASE15W.

System Configuration

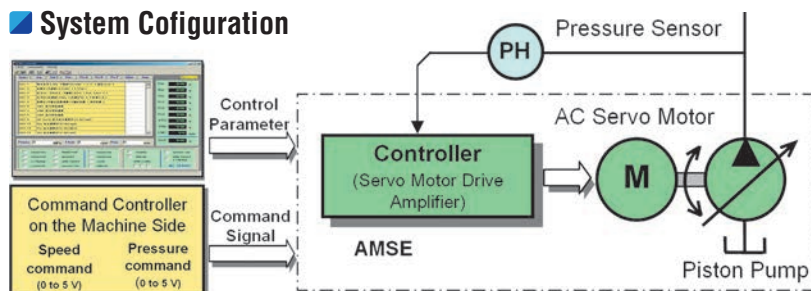


A feedback loop is by the AMSE controller that computes deviations between control signals from the machine side (speed and pressure commands) and sensor signals to drive the AC servo motor accordingly. Control parameters can be set digitally by using dedicated software.

The AC servo motor is selected according to the torque and shaft speed required to drive the hydraulic pump. The selection of an appropriate motor for the load condition is important.


Sample of Pressure–Flow Diagram

- ① Allowable continuous operating pressure: 11 MPa or less
- ② —Max. continuous operating time: 60 s


ASE3-※AA-G80




ASE5-※BZ-G130




ASE10-※CE-G200



ASE10W-※BZ-G100/58



ASE15W-4CE-G151/100



Model Number Designation

ASE3	-4	AA	-G	80	S	A100*2	N*2	-A	00	-40
Series Numbers	Power Supply	Power Capacity	Max. Operating Pres.	Max. Flow	Port Position	Coil Type for Solenoid Operated Directional Valve	Electrical Conduit Connection for Solenoid Operated Directional Valve	Function Selection	Parameter Number	Design Number
ASE3	None: AC200V 4: AC400V	AA	G: 17.5 MPa	80: 80.8 L/min*1	S: Horizontal B: Vertical	AC A100: AC100V A120: AC120V A200: AC200V A240: AC240V DC None: DC24V D12: DC12V D48: DC48V AC (AC → DC) R100: AC100V R200: AC200V	None: Terminal Box N: Plug-in Connector (Optional)	A: Single B: Combination (Single Use Allowed)	00: Standard	40
ASE5		BZ		130: 132.7 L/min*1						40
ASE10		CE		200: 205.4 L/min*1						30
ASE10W		BZ		W: User Setting 100/58: Large Flow (Sol OFF) 100 cm ³ /rev Small Flow (Sol ON) 58 cm ³ /rev						20
ASE15W	4: AC400V	CE		W: User Setting 151/100: Large Flow (Sol OFF) 151 cm ³ /rev Small Flow (Sol ON) 100 cm ³ /rev				B: Combination (Single Use Allowed)		20

*1 In case of Max. Operating Revolution.

*2 Apply to only Series Numbers "ASE10W & ASE15W".

Vane Pumps

PV2R Series Vane Pumps

These pumps have been developed especially for low noise operation. To comply with a wide range of applications including the injection moulding machines, PV2R Series pumps provide a wide range of output flows, from 5.8 to 237cm³/rev.




- ModelPV2R1, PV2R2, PV2R3, PV2R4 and Double Pumps.
- Max. Operating Pressure21MPa
- Geometric DisplacementPV2R1 : 5.8~31/PV2R2 : 41.3~64.7
PV2R3 : 76.4~115.6/PV2R4 : 136~237cm³/rev

Noise Level


Measuring condition

- Fluid viscosity : 20mm²/s
- Measurement position : One metre horizontally away from pump head cover
- Background noise : 40dB(A)

PV2R1-31



PV2R2-65



PV2R4A Series Vane Pumps

These Pumps have been developed to meet space-saving requirements. The pumps have achieved a reduction of 50% in volume and 40% in mass compared to conventional “PV2R4” pumps.



- Model PV2R4A and Duple Pumps
- Max. Operating Pressure 17.2 MPa
- Geometric Displacement 138.5/162.6/194.4 cm³/rev

Pump Type	Maximum Operating Pressure MPa	Output Flow L/min at 1200 r/min at No-Load									
		1	2	5	10	20	50	100	200	500	800
Single Pumps	7					50T	150T				
“PV2R” Series Single Pumps	21					PV2R1	PV2R2	PV2R3	PV2R4		
“PV2R” Series Double Pumps	21			Small Volume		PV2R1	PV2R2	PV2R3			
						Large Volume	PV2R2	PV2R3	PV2R4		
“PV2R4A” Series Single Pumps	17.2									PV2R4A	
“PV2R24A/34A” Series Double Pumps	21					Small Volume	PV2R2	PV2R3			
	17.2							Large Volume	PV2R4A		

Pressure Control Valves

Various type of pressure control valves are available, from relief valves to pressure switches, to control the pressure at a desired level in the hydraulic system.



Low Noise Type Pilot Operated Relief Valves




Yuken's pilot operated relief valves here have been particularly developed as low noise type. To protect the pumps and control valves from an excessive pressure, these valves are used to control the pressure in the hydraulic system at a constant level. The remote control and unloading can be done by using the vent circuit.



Noise Level

Measuring condition


Fluid viscosity : 35mm²/s
 Measuring position : At one metre back from the valve front.
 Tank line back pressure : 0.1MPa

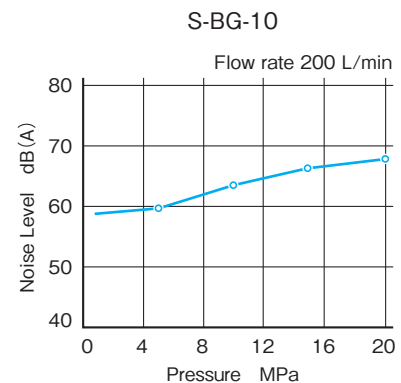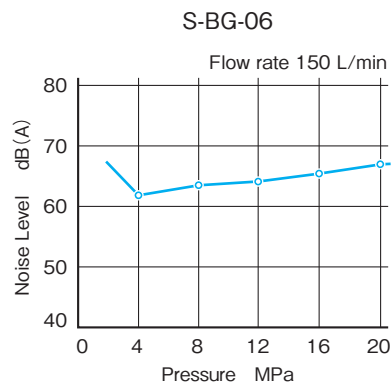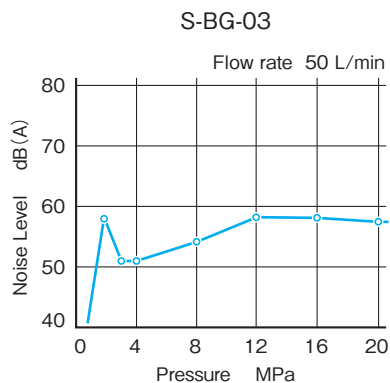

Valve Type	Maximum Operating Pressure MPa	Max. Flow L/min															
		1	2	3	5	10	20	30	50	100	200	300	500	1000	2000		
Remote Control Relief Valves	25	DT DG-01															
Direct Type Relief Valves	21	DT/DG-02															
Pilot Operated Relief Valves	25						BT/BG	03	06	10	16	24					
Low Noise Type Relief Valves	25						S-BG	03	06	10							
High Pressure Type Relief Valves	35						B3G			03	06						
Solenoid Controlled Relief Valves	25						BST/BSG	03	06	10	16						
Low Noise Type Sol. Cont. Relief Valves	25						S-BSG	03	06	10							
High Pressure Type Sol. Cont. Relief Valves	35						B3SG			03	06						
Brake Valves	25						UBGR	03	06	10							
H/HC Type Pres. Control Valves	21						HT · HG/HCT · HCG	03	06	10	16						
Pres. Reducing & Check Valves	21						RT · RG/RCT · RCG	03	06	10	16						
Pres. Reducing & Relieving Valves	25						RBG	03	06								
Unloading Relief Valves	21						BUCG	03	06	10							
Pressure Switches	35																

Flow Control Valves

These valves control the reciprocating and rotating speed of hydraulic actuators. A variety of flow control valves including pressure and/or temperature-compensated flow control valves are available.

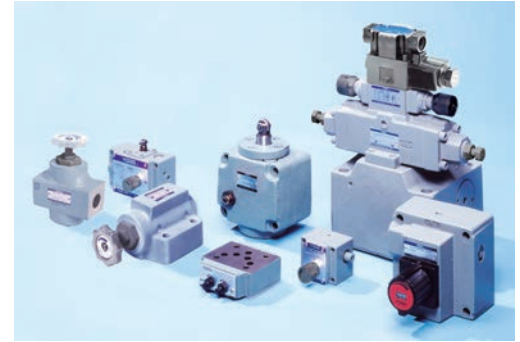


Flow Control Valves/Flow Control and Check Valves

These valves are pressure and temperature compensating type valves and maintain a constant flow rate independent of changes in system pressure (load) and temperature (viscosity of the fluid). These features allow them to control the speed of the actuator precisely. The valves with an integral check valve allow a controlled flow and reverse free flow. Repeated resetting can be made easily with a digital readout.




Flow Control Valves

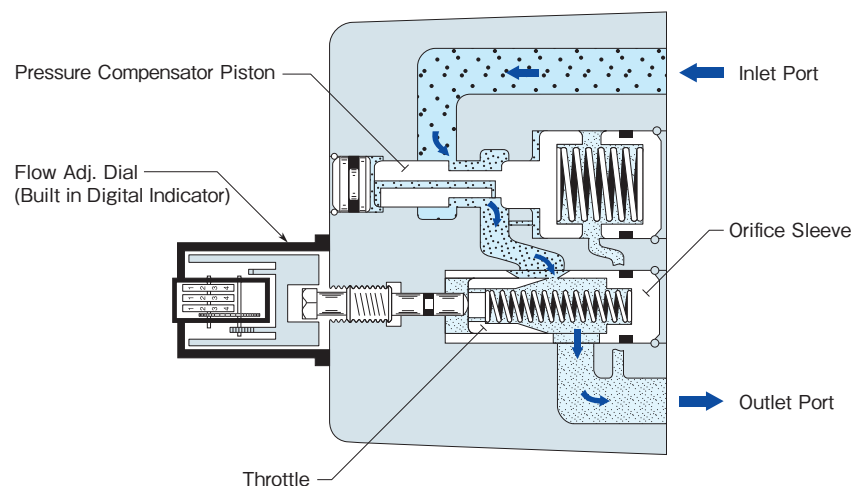

Valve Type	Maximum Operating Pressure MPa	Max. Flow L/min																
		1	2	3	5	10	20	30	50	100	200	300	500	1000	2000	3000	5000	
Flow Control (& Check) Valves	21	FG/FCG			01		02		03		06		10					
Pilot Operated Flow Control Valves	21	FHG				02		03		06		10						
Pilot Operated Flow Cont. & Check Valves	21	FHCG				02		03		06		10						
Restrictors	25	SRT/SRG				03		06		10		16		(Rated Frow)				
One Way Restrictors	25	SRCT/SRCG				03		06		10		16		(Rated Frow)				
Throttle (& Check) Modules	25	TC1G/TC2G				01		03										
Deceleration (& Check) Valves	21	ZT·ZG/ZCT·ZCG				03		06		10								
Feed Control Valves	14	UCF1G/UCF2G				01		03		04								
Needle Valves	35	GCT GCTR -02																

Directional Control Valves


These valves control the flow direction in the hydraulic circuit. The various directional valves ranging from the solenoid operated directional valves to the check valves which conform to JFPS Standard (The Japan Fluid Power Standard) are available to meet the variety in customers' needs.

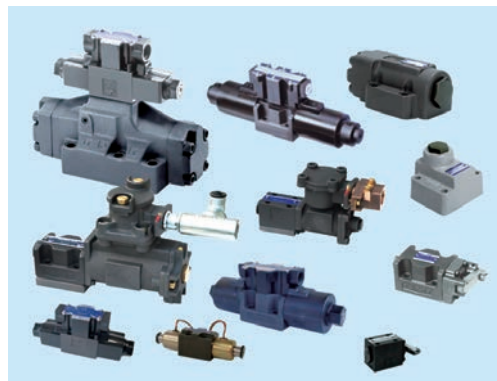

Valve Type	Maximum Operating Pressure MPa	Max. Flow L/min											
		1	2	5	10	20	50	100	200	500	1000	2000	5000
Solenoid Operated Directional Valves	25	DSG-005/007											
	35	DSG-01											
	31.5	DSG-03											
Solenoid Controlled Pilot Operated Directional Valves	21	DSHG-01											
	25	DSHG-03											
	31.5	DSHG								04	06	10	
	21	DSHF								10	16	24	32 (Rated Flow)
Energy-Saving Solenoid Operated Directional Valves	35	HE-DSG-01											
Explosion Proof (Frameproof) Type Solenoid Operated Directional Valves	35	DSG-01-***-X											
	31.5	DSG-03-***-X											
Explosion Proof (Increased Safety) Type Solenoid Operated Directional Valves	31.5	DSG-01-***-Y											
		DSG-03-***-Y											
Shockless Type Proportional Directional and Flow Control Valves	25	EDFG-01											
"G" Series Shockless Type Directional Valves	25	G-DSG 01 03											
		G-DSHG 04 06											
Poppet Type Solenoid Operated Directional Valves	31.5	DSLH-01											
Multi Purpose Control Valves	25	DSLHG 04 06 10											
Solenoid Operated Poppet Type Two-Way Valves	14	CDS*-03											
Shut-off Type Solenoid Operated Directional Valves	25	DSPC/DSPG 01 03											
Pilot Operated Directional Valves	31.5	DHG 04 06 10											
Manually Operated Directional Valves	21	Threaded connection (DMT) 03 06 10											
	31.5	Sub-plate mounting (DMG) 01 03 04 06 10											
Mechanically Operated Directional Valves	7	Rotary type DR ^T _G -02											
	25	Cam operated (DC ^T _G) 01 03											
Check Valves	25	In-line (CIT) 02 03 06 10 (Rated Flow)											
		Right angle (CRT/CRG) 03 06 10 (Rated Flow)											
		Right angle, Flanged connection (CRF) 10 16 24 (Rated Flow)											
Pilot Controlled Check Valves	25	Threaded connection (CP ^T *) Sub-plate mounting (CP ^G *) 03 06 10 (Rated Flow)											
		Flanged connection (CP ^F *) 10 16 (Rated Flow)											


Solenoid Operated Directional Valves / Solenoid Controlled Pilot Operated Directional Valves

The following is our full range of solenoid operated directional valves and solenoid controlled pilot operated directional valves.

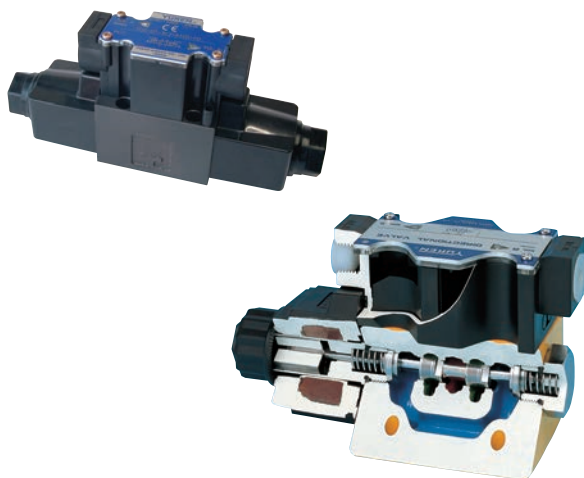

WIDE RANGE OF MODELS

Choose the optimum valve from a large selection to meet your needs.

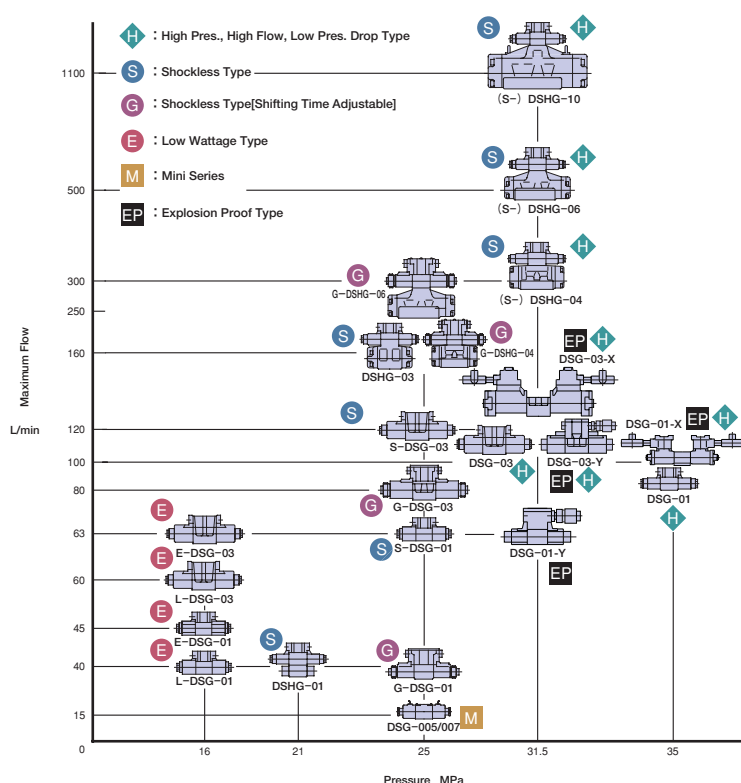

Shockless Type Proportional Directional and Flow Control Valves / Amplifiers

Shockless type proportional and flow control valves have been developed by employing the basic design concept of "G" series solenoid operated directional valves.

The maximum speed of actuators can be controlled optionally as the shockless type directional and flow control valves have maximum flow rate adjustment functions, features which are not available on the "G" series solenoid operated directional valves.

The power amplifiers for use with the shockless type directional and flow control valves have digital setting systems allowing for excellent operational maneuverability and repeatability. They offer two types of slop mode ; "SLOPE CONSTANT" and "TIME CONSTANT" , and nine different types of shockless curves (one straight line slope and eight waveforms). The optimum setting can be selected to suit any load condition.

Shockless Type Proportional Directional and Flow Control Valves

- Model EDFG-01
- Rated Flow 30L / min
- Max. Operating Pres. 25MPa



Amplifier


- Model AMN-G
- Power Supply DC 24V (20~30V)
- Max. Input Power 35W




Modular Valves

YUKEN MODULAR VALVES are designed to simplify hydraulic systems, to eliminate the use of pipe connections and to save space, time and costs. The modular valves have standardized interfaces (ISO 4401, CETOP, NFPA) and thickness in accordance with each valve size. Any hydraulic circuit can be created by stacking the modular valves in the correct sequence one upon another and bolting the various stacks to a common manifold base.

- Modular valves remarkably minimize the installation area and space.
- No expert skill is required to assemble. Changes or additions to the circuit can be easily and quickly carried out.
- Problems such as oil leaks, vibration and noise which may arise from pipes and tubes are minimized because pipes and tubes are not necessary.
- The simple installation method of modular valves allows for easy maintenance.

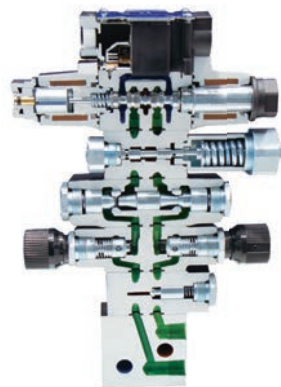

Stacking Example

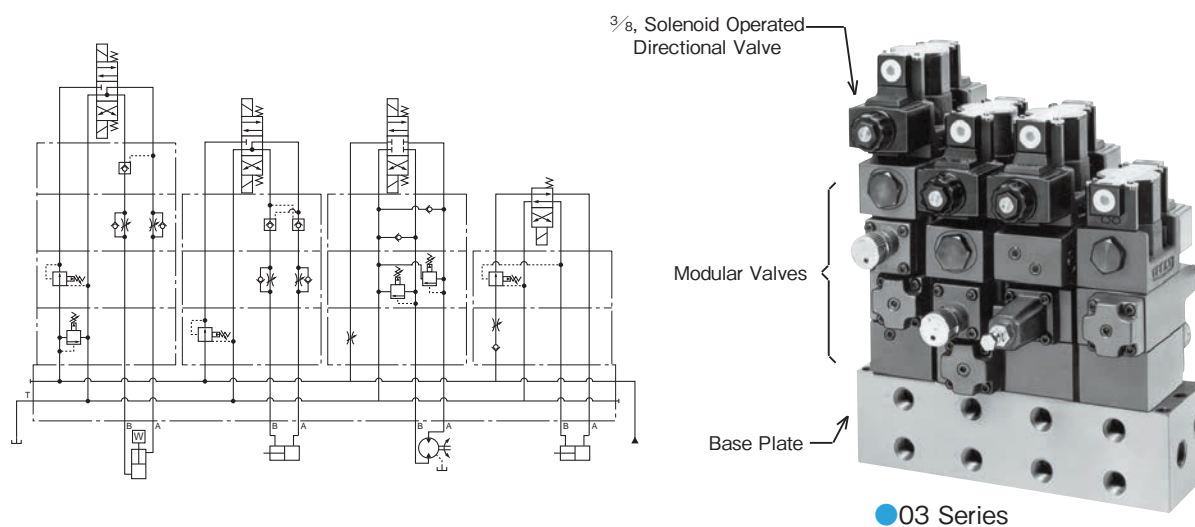

Valve Type	Maximum Operating Pressure MPa	Max. Flow L/min										
		1	2	5	10	20	50	100	200	500	1000	
005/007 Series Modular Valves	25											
01 Series Modular Valves	35							★				
03 Series Modular Valves	25							★				
04 Series Modular Valves	35											
06 Series Modular Valves	35											
10 Series Modular Valves	25											

★Max Flow for Throttle and Check Modular Valves.

List of 005/007/01/03 Series Modular Valves (Pressure Controls)

● Pressure Controls

Name	Graphic Symbols	Model Numbers	Graphic Symbols	Model Numbers
		"005/007/01" Series		"03" Series
Solenoid Operated Directional Valves		DSG-005 DSG-007 DSG-01		DSG-03
Relief Modular Valves		MBP-005		MBP-03
		MBP-01 MBA-01		MBA-03
		MBB-01		MBB-03
	—			MBW-03
Reducing Modular Valves		MRP-005 MRP-007 MRP-01		MRP-03
		MRA-01		MRA-03
		MRB-01		MRB-03
Reducing Modular Valves for Low Pressure Setting	—			MRLP-03
				MRLA-03
				MRLB-03
Reducing Modular Valves for Two Pressures Setting		MRDP-01	—	
Brake Modular Valves		MBR-01	—	
Sequence Modular Valves		MHP-01		MHP-03
Counterbalance Modular Valves		MHA-01		MHA-03
		MHB-01		MHB-03
Pressure Switch Modular Valves		MJP-01-M	—	
		MJA-01-M		
		MJB-01-M		
		MJW-01-J		

List of 005/007/01/03 Series Modular Valves (Flow Controls, Directional Controls, Others)

● Flow Controls

Name	Graphic Symbols P T B A	Model Numbers
Flow Control Modular Valves		MFP-01 MFP-03
Flow Control and Check Modular Valves		MFA-01-X MFA-03-X
		MFA-01-Y MFA-03-Y
		MFB-01-X MFB-03-X
		MFB-01-Y MFB-03-Y
		MFW-01-X MFW-03-X
		MFW-01-Y MFW-03-Y
		MFW-01-Y MFW-03-Y
Temperature Compensated Throttle and Check Modular Valves		MSTA-01-X MSTA-03-X
		MSTB-01-X MSTB-03-X
		MSTW-01-X MSTW-03-X
Throttle Modular Valves		MSP-01 MSP-03
		MST-01
Throttle and Check Modular Valves		MSCP-01 MSCP-03
		MSA-005-X MSA-007-X MSA-01-X MSA-03-X
		MSA-005-Y MSA-007-Y MSA-01-Y MSA-03-Y
		MSB-005-X MSB-007-X MSB-01-X MSB-03-X
		MSB-005-Y MSB-007-Y MSB-01-Y MSB-03-Y
		MSW-005-X MSW-007-X MSW-01-X MSW-03-X
		MSW-005-Y MSW-007-Y MSW-01-Y MSW-03-Y
		MSW-01-XY
		MSW-01-YX
		MSW-01-YX

● Directional Controls





Name	Graphic Symbols P T B A	Model Numbers
Check Modular Valves		MCP-005 MCP-01 MCP-03
		MCA-01 MCA-03
		MCB-01 MCB-03
		MCT-01 MCT-03
		MCPT-03
Anti-Cavitation Modular Valves		MCW-01 MCW-03
		MAC-01 MAC-03
Pilot Operated Check Modular Valves		MPA-01 MPA-007 MPA-007
		MPB-005 MPB-007 MPB-01 MPB-03
		MPW-005 MPW-005 MPW-01 MPW-03

● Modular Plates and Mounting Bolts

Name	Graphic Symbols P T B A	Model Numbers
End Plates		MDC-005-A MDC-007-A MDC-01-A MDC-03-A
		MDC-01-B MDC-03-B
Connecting Plates		MDS-01-PA
		MDS-01-PB
		MDC-01-AT
		MDS-03
Base Plates		MMC-005 MMC-007 MMC-01 MMC-03
Bolt Kits		MBK-005 MBK-007 MBK-01 MBK-03

List of 04/06/10 Series Modular Valves (Pressure Controls, Flow Controls, Directional Controls)

● Pressure Controls

Name	Graphic Symbols	Model Numbers
Solenoid Controlled Pilot Operated Directional Valves		DSHG-04 DSHG-06 DSHG-10
		MRP-04 MRP-06 MRP-10
		MRA-04 MRA-06 MRA-10
Reducing Modular Valves		MRB-04 MRB-06 MRB-10









005 Series
MSW-005



007 Series
MRP-007

● Flow Controls

Name	Graphic Symbols	Model Numbers
Throttle and Check Modular Valves		MSA-04-X MSA-06-X MSA-10-X
		MSA-04-Y MSA-06-Y MSA-10-Y
		MSB-04-X MSB-06-X MSB-10-X
		MSB-04-Y MSB-06-Y MSB-10-Y
		MSW-04-X MSW-06-X MSW-10-X
		MSW-04-Y MSW-06-Y MSW-10-Y












01 Series
MSW-01



03 Series
MPW-03

● Directional Controls

Name	Graphic Symbols	Model Numbers
Check Modular Valves		MCP-04
		MCT-04
Pilot Operated Check Modular Valves		MPA-04 MPA-06 MPA-10
		MPA-06※-※-X MPA-10※-※-X
		MPA-06※-※-Y MPA-10※-※-Y
		MPB-04 MPB-06 MPB-10
		MPB-06※-※-X MPB-10※-※-X
		MPB-06※-※-Y MPB-10※-※-Y
		MPW-04 MPW-06 MPW-10
Bolt Kits	—	MBK-04 MBK-06 MBK-10



04 Series
MRP-04



06 Series
MSW-06



10 Series
MSW-10

Proportional Electro-Hydraulic Controls

EH Series Proportional Electro-Hydraulic Control Valves

The EH Series on-board electronic proportional controls are compound electro-hydraulic products which merge the latest electronic and sensor technology with Yuken's reputable E Series proportional controls. Yuken has realized an industry leading position by creating compact hydraulic equipment that features high precision and reliability by unifying the amplifier, and sensor, all of which are required for proportional or servo control systems.




- Proportional control systems or servo systems can be easily structured by simply preparing the power source (DC) for controls and command signals along with the hydraulic source.

Amplifiers exclusively used for the system or separately installed control panels are unnecessary.

- By using built-in sensors;

- (1) pressure and orifice openness, which can be converted to flow rate, can be detected and controlled remotely.
- (2) along with a compound amplifier, a closed loop system can be structured.
- (3) sensor output signals or deviation signals at structuring closed loop system can be monitored.

- Disadvantages seen in ordinary hydraulic systems in which hydraulic components, sensors and amplifiers are interconnected with each other but installed separately are eliminated.

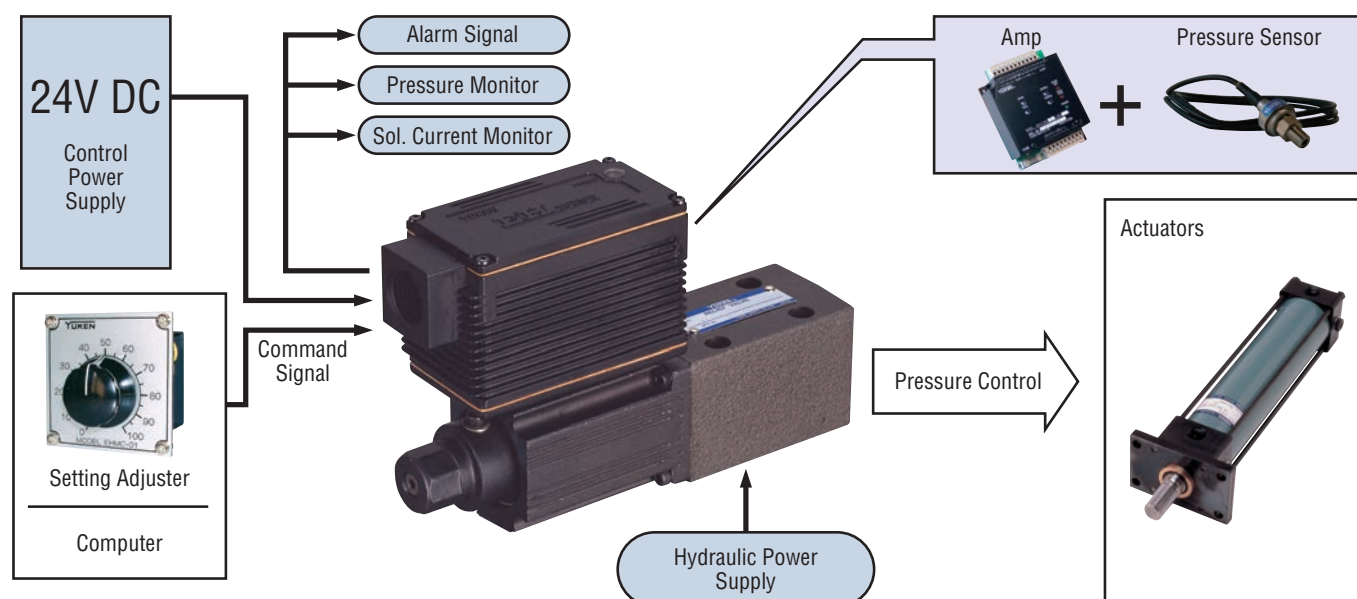


Valve Type	Maximum Operating Pressure MPa	Max. Flow L/min															
		1	2	3	5	10	20	30	50	100	200	300	500	1000			
Pilot Relief Valves	24.5	EHDG-01															
Pressure Control Valves	SB1110 : 24.5 SB1190 : 7.0	SB1110						SB1190									
Relief Valves	24.5	EHBG									03	06	10				
Reducing & Relieving Valves	24.5	EHRBG									06	10					
Flow Control (& Check) Valves	03 : 20.6 06 : 24.5	EHFG/EHFCG									03	06					
Flow Control & Relief Valves	24.5	EHFBG									03	06	10				
High Flow Series Flow Control & Relief Valves	24.5	EHFBG									03	06					
Directional & Flow Cont. Valves	25	EHDFG						01	03								
High Response Type Directional & Flow Cont.Valves	15.7	EHDFG									04	06					
Direct Operated & High Response Type Directional & Flow Cont. Valve	35	ELDFG						01EH	03EH								
Two Stage & High Response Type Directional & Flow Cont. Valve	03, 04, 10 : 35 06 : 31.5/35	ELDFHG						03EH	04EH	06EH	10EH						

Note) Setting adjusters are also available.

E Series Proportional Electro-Hydraulic Control Valves

Proportional valves are able to control the system pressure or flow proportionally through a controlled input current from the amplifier.

Our product line includes “high response type valves” that provide ultimately improved response using closed loop control that proportional control valves can offer.

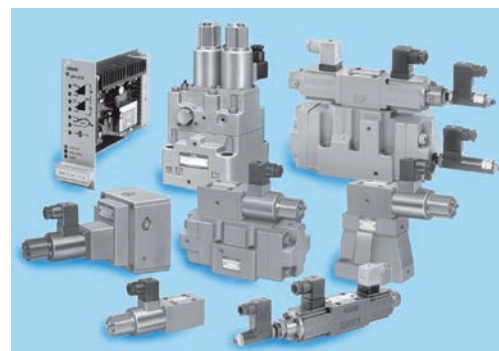

Valve Type	Maximum Operating Pressure MPa	Max. Flow L/min													
		1	2	3	5	10	20	30	50	100	200	300	500	1000	
Pilot Relief Valves	24.5	EDG-01													
Relief Valves	24.5			EBG							03	06	10		
Reducing & Relieving Valves	24.5	ERBG									06	10			
Flow Control (& Check) Valves	20.6	EFG/EFCG (40Ω Series)						02		03	06	10			
	24.5	EFG/EFCG (10Ω Series)								03	06				
Flow Control & Relief Valves	24.5	EFBG (40Ω-10Ω Series)								03	06	10			
		EFBG (10Ω-10Ω Series)								03	06	10			
		EFBG (High Flow Series)								03	06				
High Response Type Flow Control & Relief Valves	25	ELFBG-03													
Directional & Flow Cont. Valves	25	EDFG-01													
Directional & Flow Cont. Valves	25	EDFHG									03	04	06		
High Response Type Proportional Directional and Flow Control Valves	31.5	ELDFG						01	03						
	35	ELDFHG								03	04	06			

Note) Power amplifiers and setting adjusters are also available.

Amplifiers

Amplifier Type	Model Numbers	Applicable to Control Valve
DC Input	AME-D-10-※-20	Pressure or Flow Control (For 10Ω Sol.)
	AME-D-※-50	Flow Control (For 40Ω Sol.)
	AME-D2-H1-※-13	Flow Control and Relief (For 40Ω - 10Ω Sol.)
	AME-D2-1010-※-11	Flow Control and Relief (For 10Ω - 10Ω Sol.)
DC Input-Feedback	SK1022-※-※-11	Pressure or Flow Control (For 10Ω Sol.)
	AME-DF-S-※-50	Flow Control (For 10Ω Sol.)
Slow Up-Down	AME-T-S-※-22	Flow Control (For 40Ω Sol.)
DC Input For DC Power 24V DC	SK1015-11	Pressure or Flow Control (For 10Ω Sol.)
	AMN-D-10	
	AMN-W-10	
	SK1091-D24-10	Directional and Flow Control
DC Input with Minor Feedback	AMN-L-01-※-※-10	High Response Type Directional and Flow Control
	AMB-EL-※-※-※-※-20	
Shockless	AMN-G-10	Shockless Directional and Flow Control



Linear Servo Valves

High-speed Linear Servo Valves/Servo Amplifiers

High-speed linear servo valves have outstanding features of high response and exceptional contamination resistance. These features are achieved by the compact and powerful linear motor which directly drives the spool and gives electric feedback of the spool position. These valves have garnered an excellent reputation since their launch by Yuken in 2001.



On-board Electronics Type Linear Servo Valves

On-board electronics type linear servo valves have been developed based on high-speed linear servo valves, but with a focus on downsizing the pilot valve. The integration of the exclusive amplifier and the linear servo valve create a high performance valve in a compact package which greatly improves user-friendliness.




Specifications

Valve Type		Max. Operating Press. MPa	Nominal Flow L/min (Valve Pressure Differenece 7 MPa)																Frequency Response ±25% Amplitude 90° Phase Hz	Step Response 0→100% ms	Spool Type
			1	2	5	10	20	30	50	100	200	300	500	1000	2000	5000					
High-Speed Linear Servo Valves (Amplifier-Separated Type)	Direct Type	35																	450, 350	2,3	Neutral Zero lap
	Two Stage Type	35																	110	8	2:10% Overlap 2P: Zero lap (Dual Flow Gain) 40:A,B,T Connection
		900:35 1300:31.5																	105, 100	8,10	
		35																	85	15	
On-Board Electronic Type Linear Servo Valves (Standard Type)	Direct Type	35																	300	3	Neutral Zero lap
	Two Stage Type	35																	310, 260	3,4	2:10% Overlap 2L:2% Overlap (Linear Flow Gain) 2P:Zero lap (Dual Flow Gain) 40:A,B,T Connection 4J:A,B,T Connection (Neutral) or ★1
		31.5																	110	7,8	
		35																	90	11	
		820,900:35 1300:31.5																	90, 70	11,15	
		35																	70	18	
	On-Board Electronic Type Linear Servo Valves (High Performance Type)	Two Stage Type	31.5																	110	7
35																			100	11	
35																			95	12	

★1. There is no spool type “4J” in LSVHG-10EH.

Frequency Response Chart

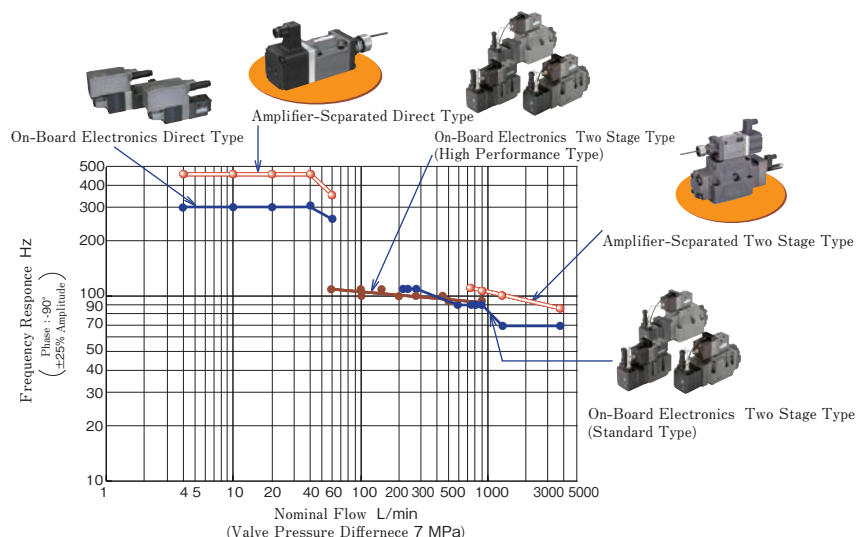

* The Japan Society of Mechanical Engineers

High-speed Linear Servo Valves/Servo Amplifiers

Linear Servo Valves covering a high response of 450 Hz (direct type)/a high flow of 3800 L/min (two stage type) !

High precision and fast responsiveness are achieved by driving the spool directly using a compact, powerful linear motor as well as by feedback of the spool position.

●High accuracy

These valves have a low hysteresis of 0.1 % or less, achieving high accuracy.


They allow the main unit to operate with much higher repeatability.

●High response characteristics

The valves provide significantly high levels of step and frequency responses ; the step response is 2 ms, and the frequency response is 450 Hz (for LSVG-03). Thus, the valves ensure that the main unit can achieve unprecedented high response.

●Excellent contamination resistance

Compared to conventional servo valves for which the permissible contamination level is up to NAS 1638 class 7, the direct type servo valves can accept the contamination level of up to class 10.

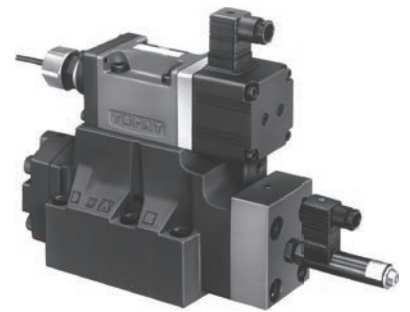

Two Stage Type — LSVHG-06



Direct Type — LSVG-03

Linear Servo Amplifiers — AMLS

On-board Electronics Type Linear Servo Valves

Introducing new high flow type models (LSVHG-10EH 3800 L/min): Wider range of products !

On-board electronics type linear servo valves have been developed based on the high-speed linear servo valves while aiming at downsizing the pilot valve and improving user-friendliness by integrating the exclusive amplifier and the high-speed linear servo valve compactly.

●High accurate, simple and convenient — Ideal on-board electronics type linear servo valves

Convenient

Fault diagnosis is easy to conduct with the alarm indication when the command signal and the spool position differ due to abnormality in the system.

Color	Description of Alarm Indicator
Green	Indication of power supply (Normal operation)
Red	Deviation alarm for the pilot valve
Yellow	Deviation alarm for the main valve

High Accuracy


Closed loop control by the combination of the position sensors for the pilot valve and the main valve in the compact amplifiers ensures excellent linearity, hysteresis and stability on control.

Simple

Highly accurate hydraulic control can be obtained only by supplying 24 V DC power and inputting a command signal voltage of 0 to $\pm 10V$, 0 to $\pm 10mA$ and 4 to 20 mA.



Direct Type — LSVG-01EH

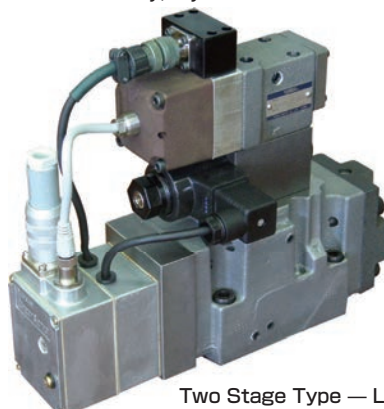

Two Stage Type — LSVHG-04EH
with Fail-Safe Solenoid Operated Valve



Hydraulic Cylinders

The actuators convert hydraulic energy to mechanical energy.



“CJT” Series Hydraulic Cylinders

“CJT” Series Hydraulic Cylinders are provided with many mounting types so that they can be used for wide use of general purpose industrial machines such as machine tools.

Moreover, Switch-Set “CJT” Series Hydraulic Cylinders with a proximity switch which facilitates detecting a position with a slide proximity switch on the cylinder body is also available.

- Various mounting types.
- Excellent ability in low speed and high-precision operation.
- Gentle stop characteristics obtained with a smooth cushion effect.

Description	Standard Type				Compact Type	Switch Set Type			
	CJT35	CJT70	CJT140	CJT210	CJT210C	CJT35L	CJT70L	CJT140L	CJT210CL
Cylinder Bore mm	Refer to the "Cylinder Bore Selection Chart"								
Nominal Pressure MPa	3.5	7	14	21		3.5	7	14	21
Min. Operating Pressure MPa	Less than 0.2	Less than 0.3	Less than 0.3	Less than 0.3	Less than 0.3	Less than 0.2	Less than 0.3	Less than 0.3	Less than 0.3
Operating Speed mm/s	8 - 300	8 - 400 ^{★1}		8 - 300	8 - 400 ^{★1}	8 - 300	8 - 400 ^{★1}		
Max. Stroke ^{★2} mm	1800	2000				1600	2000		

★1. Max. Operating Speed is varied according to the Cylinder Bore.

★2. Max. Stroke may be varied according to the Cylinder Bore. It also may be limited to lower value according to buckling strength. For details, consult Yuken.

● Cylinder Bore Selection Chart












Cylinder Bore mm	Standard Type				Compact Type	Switch Set Type			
	CJT 35	CJT 70	CJT 140	CJT 210	CJT 210C	CJT 35L	CJT 70L	CJT 140L	CJT 210CL
32	○	○	○			○	○	○	
40	○	○	○	○	○	○	○	○	○
50	○	○	○	○	○	○	○	○	○
63	○	○	○	○	○	○	○	○	○
80	○	○	○	○	○	○	○	○	○
100	○	○	○	○	○	○	○	○	
125	○	○	○	○	○		○	○	
140		○	○	○	○				
150		○	○						
160	○	○	○	○	○				
180		○	○						
200		○	○						
220		○	○						
250		○	○						

★ The mark ○ in above chart show selectable Cylinder Bore.

■ Hydraulic Cylinders

Cylinder Type		Nominal Pressure MPa	Cylinder Bore mm
Standard Type 	CJT 35	3.5	32 - 160
	CJT 70	7	32 - 250
	CJT 140	14	32 - 250
	CJT 210 CJT 210C	21	40 - 160
Switch Set Type 	CJT 35L	3.5	32 - 100
	CJT 70L	7	32 - 125
	CJT 140L	14	32 - 125
	CJT 210CL	21	40 - 80

Mounting Typs of “CJT” Cylinders

Symbol	Name	Illustration of Mounting Type	CJT35 CJT35L	CJT70 CJT70L	CJT140 CJT140L	CJT210 CJT210L
LA	Foot Mounting Side Lugs		<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
LB	Foot Mounting Side End Angles		<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	
FA	Rod Rectangular Flange		<input type="radio"/>	<input type="radio"/>		<input type="radio"/>
FE				<input type="radio"/>	<input type="radio"/>	
FY				<input type="radio"/>	<input type="radio"/>	
FB	Head Rectangular Flange		<input type="radio"/>	<input type="radio"/>		<input type="radio"/>
FF				<input type="radio"/>	<input type="radio"/>	
FC	Rod Square Flange			<input type="radio"/>	<input type="radio"/>	
FD	Head Square Flange			<input type="radio"/>	<input type="radio"/>	
CA	Cap Detachable Eye		<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
CB	Cap Detachable Clevis		<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	
TA	Rod Trunnion		<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	
TC	Intermediate Trunnion		<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
SD	Basic Type		<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>

● The mark ☐ in above chart show selectable Mounting Types.

Energy-Saving Hydraulic Units and Controllers

● Substantial energy saving of hydraulic units has been achieved by the inverter drive.

Hydraulic units equipped with variable displacement pumps feature greater energy-saving than those with fixed displacement pumps.

Yuken's energy-saving hydraulic units and controllers utilize rotational frequency control with an inverter. This innovative configuration solves the problem of efficiency losses suffered by induction motors operating at light loads and ensures significant energy savings.



Efficiency Characteristics of Induction Motors

- At Rated Output : Maximum Efficiency
- At light-load : Significant Efficiency loss


● Rotational frequency control is effective for reducing power loss.

Extensive energy saving is possible by detecting a load pressure with the pressure sensor and keeping the motor rotation at the optimum level required for pressure holding. Based on the concept above, the following two different types of inverter-driven system and packages have been developed.

- Energy-saving control system for hydraulic units (Energy saving controller)
For modification of existing hydraulic units to energy-saving type
- Equipped with the variable displacement piston pump <YA-e Pack>

● Example of Reduction of Power Consumption with Rotational Frequency Control

Combination of the AR22 Piston Pump and 7.5 kW Motor

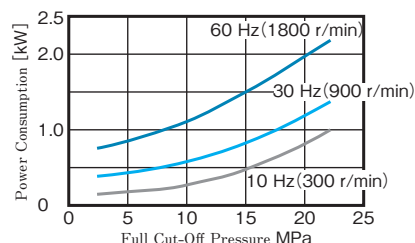

Energy-saving control system for hydraulic units (Energy saving controller)

Energy-saving effects can be achieved by adding the controller, the pressure sensor, and the inverter to an existing unit and carrying out simple adjustments.

■ System Configuration

The following 5 monitoring figures can be indicated.

- ① Input voltage or pressure for Pressure sensor
- ② Inverter output (r/min)
- ③ Simple arithmetic figure for Power (kW)
- ④ Sequence input code
- ⑤ Alarm output code

Controller for setting rotational frequency of the inverter
AMC-IV-2-10

Pressure Sensor




Inverter



Existing Hydraulic Power Unit

- Applicable Induction Motor : 0.75 to 7.5 kW
- Applicable Pump : Variable displacement Piston Pump

■ Example of Reduction Rate of Power Consumption (Machining line for auto parts)

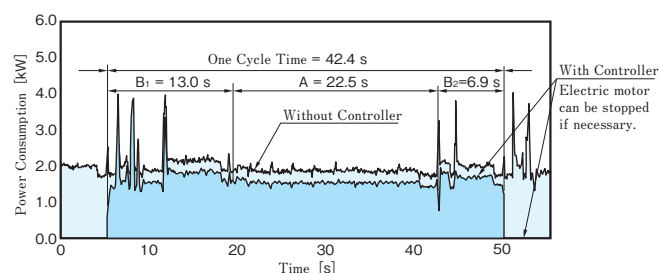

Symbol	Status	Average of Power Consumption		
		Without Controller	With Controller	Reduction Rate
A	Standby	1.80 kW	1.47 kW	Approx. 18%
B1 + B2	Actual Work	2.01 kW	1.69 kW	Approx. 16%


■ Specifications

- Model AMC-IV-2-10
- Output Voltage for Inverter ... Select one of the following voltage (0 to +5 V, +1 to +5 V, +0.5 to +5 V)
- Input Voltage for Pressure Sensor ... Select one of the following voltage (0 to +5 V, +1 to +5 V, +0.5 to +5 V)
- Power Supply for Pressure Sensor ... +5 V
- Voltage for Power Source AC 100/200 V
- Power Consumption Less than 6 VA
- Ambient Temperature 0 to 50 °C

★ Also available with on simple model that is easy set up. For details, please ask Yuken

Standard Hydraulic Power Units

These hydraulic power units achieve energy-saving operation with a high efficiency piston pump.

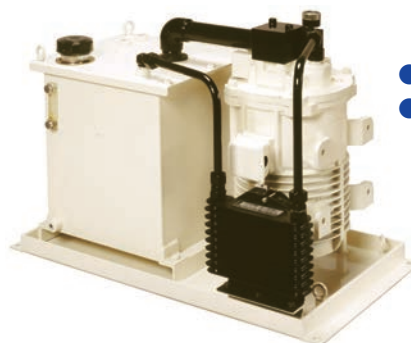

- Compact and lightweight
- Low noise level

YP Pack



YA Pack

● Wide assortment of models

A total of 35 models are available according to the combination of the built-in pump, the reservoir capacity, and the motor output, so that the most suitable model can be selected.

● Facilitating the configuration of the control circuit

With 21 different options (incorporating a base plate, etc.), a wide variety of control circuits can be easily configured.



- Greatly reducing power consumption
- Low noise
- Low heat generation

YA-e Pack

Hydraulic Power Unit Type	Model Numbers	Max.Operating Pressure MPa	Reservoir Capacity L								Geometric Displacement cm ³ /rev						Electric Motor kW×4P	
			1	2	5	10	20	50	100	200	1	2	5	10	20	50		
Standard Hydraulic Power Unit YP Pack	YP10	7/16																0.75/1.5
	YP16	16																1.5/2.2
	YP22																2.2/3.7	
	YP37																3.7/5.5	
Standard Hydraulic Power Unit YA Pack	YA10	7/16																0.75/1.5/2.2/3.7
	YA16																0.75/1.5/2.2/3.7/5.5/7.5	
	YA22																2.2/3.7/5.5/7.5	
	YA37	7															3.7/5.5/7.5	
Energy-Saving Hydraulic Power Unit YA-e Pack	E-YA10	7/16																2.2/3.7
	E-YA16																0.75/1.5/2.2/3.7/5.5/7.5	
	E-YA22																2.2/3.7/5.5/7.5	
	E-YA37	7															3.7/5.5/7.5	
Energy-Saving Control System for Hydraulic Unit	AMC-IV	—	—								—						—	

Worldwide YUKEN Affiliated Companies and Distributors

■ Affiliated Company ● Distributor ◆ Service Center

ARGENTINA

- **Distritec S.A.**
Av.85 No.1113 (B1650 HWG) San Martin,
Buenos Aires ,ARGENTINA
Tel. +54-11-4754-6000
Fax. +54-11-4755-9093
URL <http://www.distritec.com.ar>

AUSTRALIA

- **ACT Corporation (Australia) Pty. Ltd.**
5 Woorabinda Street, Runcorn QLD4113,
Australia
Tel. +61-7-3841-5788
Fax. +61-7-3841-4088
URL <http://www.actcorp.com.au>

AUSTRIA

- **Eurofluid Hydraulik GmbH.**
Europastr. 5, A-3442 Tulln-Langenrohr ,AUSTRIA
Tel. +43-2272-66990
Fax. +43-2272-66991
URL <http://www.eurofluid.at>

BELGIUM

- **Vameco B.V.B.A.**
Zeepziederijstraat 5-postbus 62 Diksumuide
8600 ,BELGIUM
Tel. +32-5150-0117
Fax. +32-5150-4117
URL <http://www.vameco.be>

BRAZIL

- **Hidracomp Componentes Hidraulicos Ltda.**
Rua Dr. Edgard Magalhaes Noronha, 704-Vila
Nova York, CEP 03480-000 Sao Paulo -SP ,BRAZIL
Tel. +55-11-2721-1113
Fax. +55-11-2721-9302
URL <http://www.hidracomp.com.br>
- **KBK do Brazil Comercio de Maquinas Ltda.**
Rua da Consolacao, 1992-3 andar, Conj.32,
Edificio Royal Park, CEP:01302-001
-Consolacao- Sao Paulo -SP- ,Brazil
Tel. +55-11-3257-8700
Fax. +55-11-3257-8900
URL <http://www.kbk-brasil.com.br>

CHINA

- **Yuken Kogyo (Shanghai) Co., Ltd.**
(Head Office)
Room 916, Bldg.B, Far East International Plaza,
No.317 Xian Xia Road, Shanghai ,CHINA
Tel. +86-21-6235-1313
Fax. +86-21-6235-0673
URL <http://www.yuken-china.com.cn>
E-mail yuken-cn.com
(Dalian Branch)
Rm 1505, Rainbow Building, No.23, Renmin Road,
Zhongshan District, Dalian Liaoning ,CHINA
Tel. +86-411-3986-9129
Fax. +86-411-3986-9127
- **Yuken Kogyo (Foshan) Co., Ltd.**
Unit 101, NO.1, Keying International Industrial
Zone, No.7 Xinghai Road, Shunde Industrial
Zone, Wusha Daliang, Shunde Foshan ,CHINA
Tel. +86-757-2280-5066
Fax. +86-757-2280-5068
URL <http://www.yuken-china.com.cn>
- **Yuken Hydraulics (Zhangjiagang) Co., Ltd.**
No.9 Xin Jing Xi Road, Zhangjiagang Economic
Development Zone, Jiangsu ,CHINA
Tel. +86-512-5699-2111
Fax. +86-512-5699-2100

Service Center in China

- ◆ **Yuken Kogyo (Ningbo) Hydraulic Technology Company Limited**
1st Floor, Block No.5, No.58 Ke Chuang South
Road, Wang Chun Industrial Zone, Ningbo City,
Zhejiang ,CHINA
Tel. +86-574-8792-8836
Fax. +86-574-8792-9773

- **HY ENTERPRISE (HANGZHOU) CO., LTD**
Room 410, Building 18, Overseas High-level
Talents Innovation Park, Wenyi West Road
No.998, Hangzhou ,CHINA
Tel. +86-571-8722-5068
Fax. +86-571-8722-5066
URL <http://www.hy-china.com>

CHINA

- **SHANGHAI YONGJIE HYDRAULIC & PNEUMATIC CO., LTD**
No.526 Zhenda Rd. Shanghai ,CHINA
Tel. +86-21-6364-0605
Fax. +86-21-6364-0486
URL <http://www.yjyeya.com>
- **KUNSHAN YUANYE HYDRAULIC MACHINERY CO., LTD**
No.5, 68 Luxingzhi Rd, Zhoushi
Town, Kunshan ,CHINA
Tel. +86-512-5017-5868
Fax. +86-512-5017-5885
URL <http://www.ksyyny.com>
- **SUZHOU ZHONGMAO AUTOMATION CONTROL SYSTEM CO., LTD**
No.38 Donghai Lane, Suzhou CHINA
Tel. +86-512-6558-6985
Fax. +86-512-6558-6986
- **BEIJING JIN TIAN CHENG MEC. & ELEC. EQUIPMENT CO., LTD**
No.1000 Jinzhan Village BeiMaFang
Dongwei Lu Dong, Beijing ,CHINA
Tel. +86-10-8433-4367
Fax. +86-10-8433-4371
URL <http://www.jtjcd.com>
- **SHENYANG BONHEUR AUTOMATION ENGINEERING CO., LTD**
Room612, HongXiang Bldg, No.45
Wanlitang Rd. Shenyang ,CHINA
Tel. +86-24-2482-8218
Fax. +86-24-2482-8285
URL <http://www.sybonheur.com>
- **DALIAN RUIZHONG TECHNOLOGY CO., LTD**
Room613, Free Trade Mansion, No.1 Dongting
Road, Dalian Free Trade zone ,CHINA
Tel. +86-411-8730-1125
Fax. +86-411-8803-2036
- **HY HYDRAULIC TECH(SHENZHEN) CO.,LTD.**
1st and 2nd Floor,Baical Intelligent Manufacturing Park,
No.168-1,Chaoyang Road,Yanluo Street,Baoan District,
Shenzhen CHINA
Tel. +86-755-2583-2095
Fax. +86-755-8207-0660
URL <http://www.hy-china.com>
- **SHENZHEN YUKLY HYDRAULIC TECH CO., LTD**
1st Floor,Blk K,Shifeng Industry,Shutai Road,
Loucun,Xinhu,Guangming,Shenzhen CHINA
Tel. +86-755-8325-6797
Fax. +86-755-8334-2513
URL <http://www.yukly.com.cn>
- **SHANGHAI ROKEN HYDRO-TECH CO.,LTD**
6-501,OASIS Middle Ring Centre,NO.1678
Jinshajiang Road,Putuo District,Shanghai CHINA
Tel. +86-21-6180-8099
Fax. +86-21-6529-5096
- **KUNSHAN DANXIN OIL PRESSURE MACHINE CO.,LTD**
D Build,No.698,Wulian Road,North Yushan Town,
Kunshan City,Jiangsu,CHINA
Tel. +86-512-5776-0966
Fax. +86-512-5776-1366
URL <http://www.danxinyouya.com>
- **XIAMEN DANXIN AUTOMATION EQUIPMENT CO.,LTD**
Room 132,NO.169 Fanghu South Road,Huli
District,Xiamen,Fujian CHINA
Tel. +86-592-5595-371
Fax. +86-592-5595-372

DENMARK

- **Hydro Service Aps**
Glarmester Vej 18, DK-6710 Esbjerg, DENMARK
Tel. +45-75-155855
Fax. +45-75-155093
URL <http://www.hydroservice.dk>

EGYPT

- **E. M. A. Co.**
292 Ramsis 2 Extension Nasr City, Cairo ,EGYPT
Tel./Fax. +20-2-386-5509
URL <http://www.ema.com.eg>

FRANCE

- **DHPS Sarl.**
1 Impasse Du Jardin Renard, 95110
Sannois ,FRANCE
Tel. +33-1-3026-2626
Fax. +33-1-3025-2737
URL <http://www.dhps-france.com>

HONG KONG - CHINA

- **YUKEN KOGYO (H.K.) COMPANY LIMITED**
Flat 20, 7F., Block B Focal Industrial Centre, 21 Man
Lok Street, Hung Hom, Kowloon, HONG KONG
Tel. +852-2362-2355
Fax. +852-2765-7612
E-mail yuken@yuken.com.hk

INDIA

- **YUKEN INDIA LIMITED**
No.11,12,16,17,18,Koppathimanahalli Village,
Malur-Hosur Road, Malur Taluk,Kolar District,
Karnataka 563160, India
Tel. +91-80-2845-2262
Fax. +91-80-2845-2261
URL <http://www.yukenindia.com>
E-mail enquiry@yukenindia.com

INDONESIA

- **PT.PANDULIMA JAYATEKNIK**
Jalan Penghela 2C-D, Surabaya 60174,INDONESIA
Tel. +62-31-546-5679
Fax. +62-31-546-7060
URL <http://www.ptpandulima.com>
- **PT. Samudra Teknindo Hydraulmatic**
Jl. Prof Latumenten,(GG Hasbikan III)No.35.
Angke Tambora, Jakarta Barat-11330
Tel. +62-21-630-8889
Fax. +62-21-630-8989
URL <http://samudrateknindo.com>

IRELAND

- **Hydraquip Ltd**
Unit W5A, Tougher Ind. Est, Ladytown, Naas, Co.
Kildare,IRELAND
Tel. +353-4543-8415
Fax. +353-4543-8417
URL <http://www.hydraquip.ie>

ITALY

- **Metau Engineering s.r.l**
Piazza Villed' Etupes, 18-21043
Castiglione Olona Verese ,ITALY
Tel. +39-0331-857000
Fax. +39-0331-859132
URL <http://www.metau-engineering.it>

JAPAN

- YUKEN KOGYO CO., LTD**
International Sales Department
4-4-34, Kamitsuchidana-Naka, Ayase, Kanagawa
Pref., 252-1113 ,JAPAN
Tel. +81-467-77-3111
Fax. +81-467-77-3115
URL <http://www.yuken.co.jp/english>
E-mail int.bd@yuken.co.jp

KOREA

- **Yuken Korea Co., Ltd.**
(Head Office)
Rm 210, ASIA Bld., 590, Gyeongin-Ro,
Guro-Gu, Seoul ,KOREA
Tel. +82-2-2675-2110
Fax. +82-2-2675-2104
URL <http://www.yuken.co.kr>
E-mail master@yuken.co.kr
(Busan Branch)
557-10 Gwaebepo-Dong, Sasang-Gu, Busan ,KOREA
Tel. +82-51-315-2110
Fax. +82-51-315-2104
(Gimhae Branch)
58-1,Jangyu-Ro 115, Gimhae-Si,
Gyeongsangnam-Do,KOREA
Tel. +82-55-312-2150
Fax. +82-55-312-2107
- **SEWON Hydraulic**
18-110, Industrial Tools Commercial Cooperative,
Guro 2-dong, Guro-gu, Seoul ,KOREA
Tel. +82-2-2634-9187
Fax. +82-2-2634-7109
URL <http://www.sewon-hydro.co.kr>
- **DAEDONG Hydraulic Pneumatic Co.Ltd**
105 Hanlim Market,124-1 Gamjeon
Dong, Sasang-gu, Busan ,KOREA
Tel. +82-51-317-2358
Fax. +82-51-317-2360

Worldwide YUKEN Affiliated Companies and Distributors

■ Affiliated Company ● Distributor ◆ Service Center

MALAYSIA

- **MEGA ENGINEERING (M) Sdn Bhd.**
45, Jalan Perindustrian Trian Silibin 1, Kawasan Perindustrian Ringan Silibin 30100 Ipoh, Perak, MALAYSIA
Tel. +60-5-527-9823
Fax. +60-5-527-2711
URL <http://www.mega.net.my>
- **PANCA HYDRAU-PNEUMATIC Sdn Bhd.**
No.7, Jalan Apollo U5/186, Bandar Pinggiran Subang 40150 Shahalam, Selangor, MALAYSIA
Tel. +60-3-784-74009
Fax. +60-3-784-74019

MEXICO

- **Yukme S.A.De C.V.**
Zaragoza No.7, Col. Sta. Ana Tlalpaltitlan C.P. 50160, Toluca, EDO. DE, MEXICO
Tel. +52-722-217-2252
Fax. +52-722-217-2352
URL <http://www.yukme.com>

NORWAY

- **Hydramek AS**
Myrasdalen 8, 1407 Vinterbro, NORWAY
Tel. +47-92804999
Fax. +47-64942734
URL <http://www.hydramek.no>

PHILIPPINES

- **L&L Optimum Commercial Corporation**
7 Basswood St., Greenwoods Exec. Vill. Cainta, Rizal, 1900 PHILIPPINES
Tel. +63-2-642-4895
Fax. +63-2-643-9241
URL <http://www.lloptimum.com>

POLAND

- **Brammer**
Przedsiebiorstwo Produkcyjno-Handlowe, 60-167 Poznanul, Olesnicka 15, POLAND
Tel. +48-61-868-5911
Fax. +48-61-868-9355
URL <http://www.brammer.pl>
- **Salus**
ul.Pagorkowa 28/2, 80-126 Gdansk, POLAND
Tel. +48-504-029-736
URL <http://www.salushydraulics.pl>

PORTUGAL

- **Fluidraulica-Eq. Hydraulicos LDA**
Meaes-Lousado 11, VN Famalicao, 4760 Lousado, PORTUGAL
Tel. +351-252-316215
Fax. +351-252-316280
URL <http://www.fluidraulica.com>

RUSSIA

- **Enerprom-Mikuni Group**
28 Starokuzmikhinskaya str., Irkutsk, RUSSIA
Tel. +7-3952-211-541
Fax. +7-3952-255-797
URL <http://www.mikuni.ru>
- **Gidrostanok Ltd.**
Dushinskaya 7/2 Moscow, RUSSIA
Tel. +7-495-606-2590
Fax. +7-495-361-0883
URL <http://www.gidrostanok.ru>
E-mail Ponomarev.vladimir@gmail.com
- **ARKUDA LLC**
Shiramova str.36 office 503, Irkutsk, RUSSIA
Tel. +7-3952-230-831
Fax. +7-9027-613-553
URL <http://www.arkuda.com.ru>
- **Enerprom-M JSC(European territory of Russia)**
2 Bldg, 12 Kostyakova street, Moscow, RUSSIA
Tel. /Fax. +7-495-745-95-98
- **MIKEN JSC(Asian territory of Russia)**
28 Starokuzmikhinskaya street, Irkutsk, RUSSIA
Tel. /Fax. +7-3952-211-743

SINGAPORE

- **ACE SYSMEC PTE LTD**
51 Ubi Avenue 1, #03-20 Paya Ubi Industrial Park, SINGAPORE
Tel. +65-6285-0900
Fax. +65-6289-5505
- **Oriental connection Pte Ltd.**
40 Toh Guan Road East#01-71 Enterprise Hub, SINGAPORE
Tel. +65-6793-6366
Fax. +65-6793-6355

SOUTH AFRICA

- **Ernest Lowe Co.Za**
6 Skew Road Boksburg North 1460 Gauteng, SOUTH AFRICA
Tel. +27-11-898-6600
Fax. +27-11-918-3974
URL <http://www.elco.co.za>
- **The Hydraulic Centre**
19 Derrick Coetzee, Jet park, POBox 745, Maraisburg, SOUTH AFRICA
Tel. +27-11-613-6560
Fax. +27-86-547-2159
URL <http://www.hphub.co.za>

GERMANY

- **DAUNER**
Industriestrase 3, 96120 Bischberg-Trosdorf, GERMANY
Tel. +49-9503-50008-0
Fax. +49-9503-50008-49
URL <http://www.dauner-antriebstechnik.de>

SPAIN

- **Servitec Industriales Tecnicos SA**
Poligono Industrial Palmones-11 Gondola-12 Los Barrios (Cadiz), SPAIN
Tel. +34-5-5667-7361
Fax. +34-5-5667-7903
- **Diprax**
Pol. Belartza. C/Gurutegi 17 Pab 04/05. 20018 San Sebastian SPAIN
Tel. +34-943-377-740
Fax. +34-9-4337-6923
URL <http://www.diprax.es>

SWEDEN

- **P & N Hydraulics**
Ostra Zinkgatan 3 SE-271 Ystad, SWEDEN
Tel./Fax. +46-41-118658
URL <http://www.pnhydraulics.com>

SWITZERLAND

- **Oelhydraulik Hagenbuch AG.**
Risching 1, Ch-6030 Ebikon LU, SWITZERLAND
Tel. +41-41-444-1200
Fax. +41-41-444-1201
URL <http://www.hagenbuch.ch>

TAIWAN

- **YUKEN HYDRAULICS (T.W.) CO., LTD.**
(Head Office)
NO.12, 7th Road, Taichung Industrial Park, Taichung, TAIWAN R.O.C.
Tel. +886-4-2359-3077
Fax. +886-4-2359-8813
URL <http://www.yuken.com.tw>
E-mail office@yuken.com.tw
(Taipei Branch)
No.18-1, Wun Hua 5th Road, Guei Shan Township, Taoyuan County, TAIWAN R.O.C.
Tel. +886-3-328-3628
Fax. +886-3-328-3242
- **San Shin Co., Ltd.**
59 Cheng Kung Road, Tainan, TAIWAN
Tel. +886-6-223-4191
Fax. +886-6-220-0218

THAILAND

- **YUKEN SEA CO., LTD.**
1 Glas Haus Building, 9th Floor Unit903 Sukhumvit 25 Road, Khlongtoei-nue Wattana, Bangkok, THAILAND
Tel. +66-2-259-2802
Fax. +66-2-259-2803
URL <http://www.yuken-sea.com>
- **BISHO ENGINEERING ASIA CO., LTD**
1 C2 Room, 18Th Floor, Md Tower, Soi Bangna-Trad25 Bangna-Trad Rd, Bangna Bangkok 10260 THAILAND
Tel. +66-2-744-1034
Fax. +66-2-744-1037
URL <http://www.okayama-bisho.co.jp>
- **CHAVANAN CORPORATION LIMITED**
156 Soi Thonglor, Sukhumvit 55 road, Klongton Nua, Vadhana Bangkok 10110 THAILAND
Tel. +66-2-392-4692
Fax. +66-2-381-1832
URL <http://www.chavanan.com>
- **FLUID POWER ENGINEERING CO., LTD**
74 Soi Supapong 1 Yak 6, Srinakarin Rd., Nongbon, Prawet, Bangkok 10250 THAILAND
Tel. +66-2-321-8941
Fax. +66-2-721-4242
URL <http://www.fluidpower.co.th>

THAILAND

- **IWASE (THAILAND) CO., LTD**
33/4 The 9th Towers Grand Rama 9, 17th Floor, Room No. TNB04, Rama 9 Rd., Huai Khwang, Huai Khwang, Bangkok 10310 THAILAND
Tel. +66-2-168-1305
Fax. +66-2-168-1308
URL <http://www.iwase-net.co.jp>
- **TERMINAL SEAL & SERVICE CO., LTD**
49/151 M.12 Pradithmanutham Rd., Klongkum, Bangkok, Bangkok 10230 THAILAND
Tel. +66-2-942-9979
Fax. +66-2-942-9980
URL <http://www.terminalseal.com>

TURKEY

- **Mert Teknik Fabrika Malzemeleri Ticaret ve Sanayi A.S.**
Tersane Cad No.43, (34420) Karakoy-Istanbul, TURKEY
Tel. +90-212-252-8435
Fax. +90-212-245-6369
URL <http://www.mert.com>
- **Ozkan Hidrolik + Pnmatik**
4 San. St. 129/6 Sk.No.39, Bornova - Izmir 35050, TURKEY
Tel. +90-23-2375-8754
URL <http://www.ozkanhidrolik.com.tr>

UKRAINE

- **Izumrud**
02121 Kiev, Dekabristov Str 7, UKRAINE
Tel./Fax. +380-445-636-160

UNITED KINGDOM

- **YUKEN EUROPE LTD**
51 Spindus Road, Speke Hall Industrial Estate, Liverpool L24 1YA, UNITED KINGDOM
Tel. +44-151-486-4696
Fax. +44-151-486-3537
URL <http://www.yuken.co.uk>
E-mail office@yuken.co.uk
- **East Yorkshire Hydraulics Ltd.**
Units 4B / 4C Harplings Rd., National Avenue, Hull HU5 4JF, UNITED KINGDOM
Tel. +44-1482-440-222
Fax. +44-1482-440-225
URL <http://www.eyh.co.uk>
- **ISIS Fluid Control Ltd**
Station Rd, Chipping Norton, Oxon OX7 5HZ, UNITED KINGDOM
Tel. +44-1608-645-755
URL <http://www.isis-fluid.co.uk>

U.S.A.

- **ALA INDUSTRIES LIMITED**
3410 DELTA DRIVE, PORTAGE, IN 46368, USA
Tel. +1-219-762-2059
Fax. +1-219-762-2066
URL <http://www.yuken-usa.com>
E-mail ala@yuken.org

VIET NAM

- **CNN ENGINEERING & TRADING CO., LTD**
286C Minh Phung STR., Ward 2, Dist, 11, HO CHI MINH City, VIETNAM
Tel. +84-28-3969-6185
Fax. +84-28-3969-6236
URL <http://www.thietbithuyluccnn.com>
- **R.T ELECTRONIC PNEUMATIC HYDRAULIC TRADING CO.,LTD**
144 Ky Con Str., Nguyen Thai Binh Ward, Dist.1, HO CHI MINH City, VIETNAM
Tel. +84-28-3914-0577
Fax. +84-28-3821-8614
URL <http://www.thuykhdien.com.vn>
- **THANG LONG TECH CO., LTD**
82 Le Thanh Nghi Str, Hai Ba Trung Dist, Hanoi, VIETNAM
Tel. +84-24-3623-0117
Fax. +84-24-3623-0116
URL <http://www.thanglongtech.com.vn>

YUKEN KOGYO CO., LTD.

International Sales Department (Head office) :
4—34 Kamitsuchidana—Naka, 4—Chome, Ayase,
Kanagawa 252—1113 Japan

Telephone: 81—467—77—3111 Facsimile: 81—467—77—3115
URL <http://www.yuken.co.jp> E-mail int.bd@yuken.co.jp

Distributor or Agent

Hydraulic Equipment

July 1992 Fist Edition
Mar 2012 Revised Edition 4
Oct 2015 Revised Edition 5
Mar 2019 Revised Edition 5A

Printed in Japan

1903050 (K)
1510050 (K)
1203050 (CH)